


AUDIO TRANSFORMER


| Turns ratio | 1 : 1 ± 2% | | | |
|-------------------------------------|------------|------|------|-------|
| Parameter | Min. | Typ. | Max. | Units |
| DC Resistance Pins 1-2 | | | 85 | Ω |
| DC Resistance Pins 4-3 | | | 110 | Ω |
| Dielectric Rating | 1250 | | | VAC |
| Insertion Loss | | | 1.7 | dB |
| Frequency Response 50Hz - 15kHz | | 0.5 | | dB |
| Return Loss 200-4000 Hz vs 600 Ω | | 2.3 | | dB |

Schematic Diagram



Materials used in construction of this component meet or exceed UL Class B and can be operated up to 130°C

Dimensions in Inches (mm)

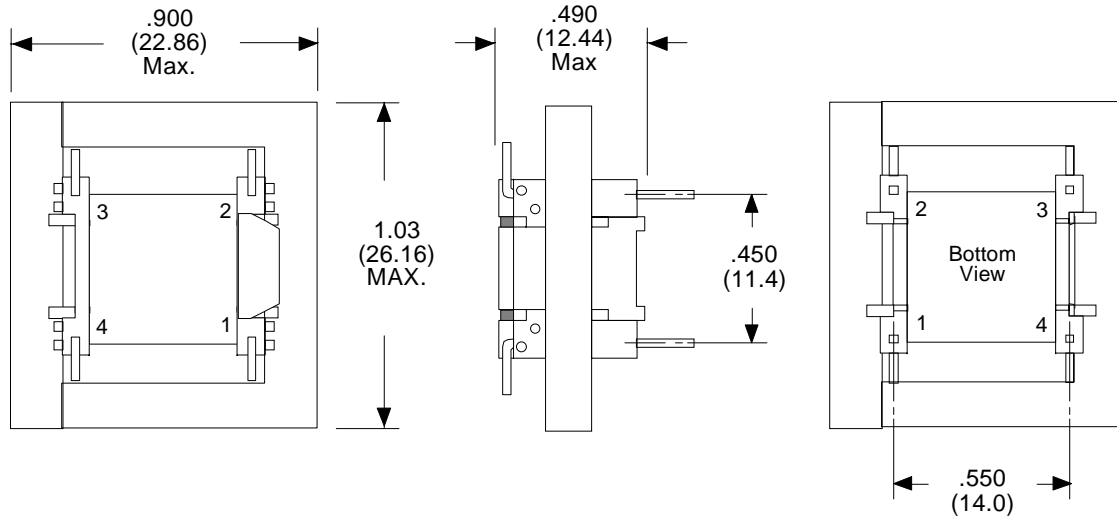

RHOMBUS P/N: T-1399

CUST P/N:

NAME:

DATE: 03/07/01

SHEET: