


PARAMETER		UNITS
(1) Inductance	85.0 Min.	μ H
(1) Leakage Inductance	0.25 Max.	μ H
(1) Interwinding Capacitance	12 Max.	pF
Primary DC Resistance	0.30 Max.	Ω
Isolation (HI-POT)	500 Min.	V _{RMS}
SRF (Ref.)	20	MHz
Insulation Resistance	10k Min.	M Ω
Power Rating	250	mW
Crosstalk 60 dB @ 5 MHz Nominal 50 dB @ 10 MHz Nominal		
Longitudinal Conversion Loss 0 - 300KHz 56 dB Min. 300 KHz - 500KHz 52 db Min. 500 KHz - 1MHz 46 dB Min. 1MHz - 5 MHz 36 db Min.		
Operating Temperature Range -40°C TO +85°C Storage Temperature Range -55°C TO +125°C		

High Frequency Data Line Filter

3 Coils 6 Data Lines

Schematic Diagram

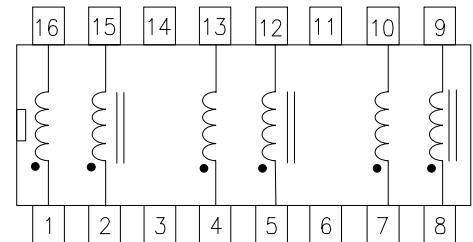


Turns ratio 1:1 + 0%
Current Rating: 100mA

¹Tested at 100KHz and 500 mV_{RMS}

Operating temperature Range
-45°C to +85°C

Physical Dimensions in inches (mm)

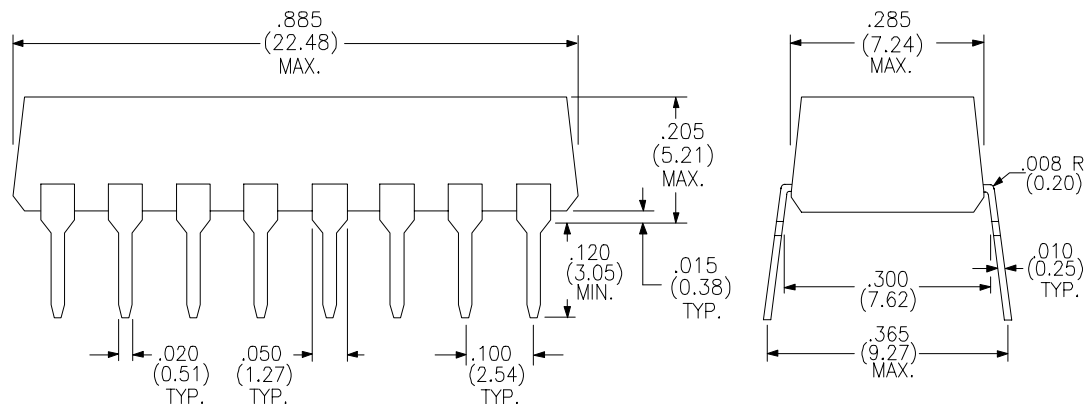

RHOMBUS P/N: **F-129**

CUST P/N:


NAME:

DATE: **1/25/01**


SHEET:

High Frequency Data Line Filter: P / N F-129

Impedance

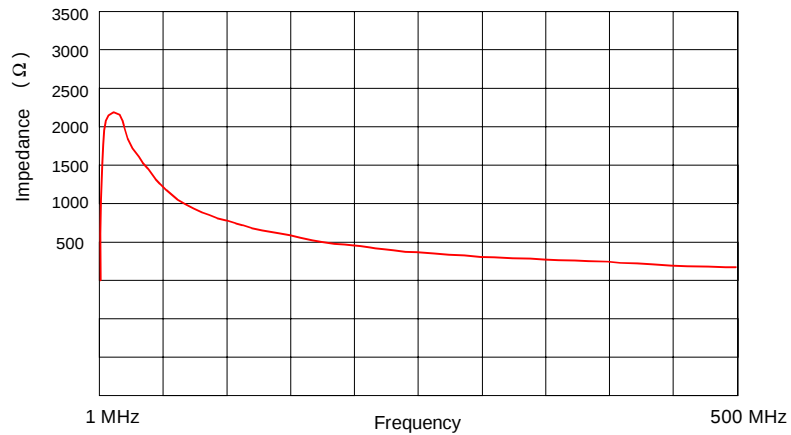

Crosstalk

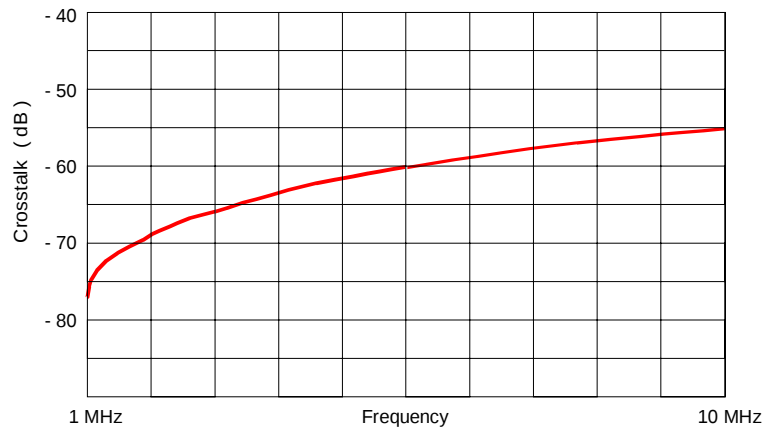

RHOMBUS P/N: **F-129**

CUST P/N:

NAME:

DATE: **1/25/01**

SHEET:




**Rhombus
Industries Inc.**
Transformers & Magnetic Products

www.rhombus-ind.com

15801 Chemical Lane,
Huntington Beach, CA 92649-1595
Phone: (714) 898-0960 • FAX: (714) 896-0971

Crosstalk

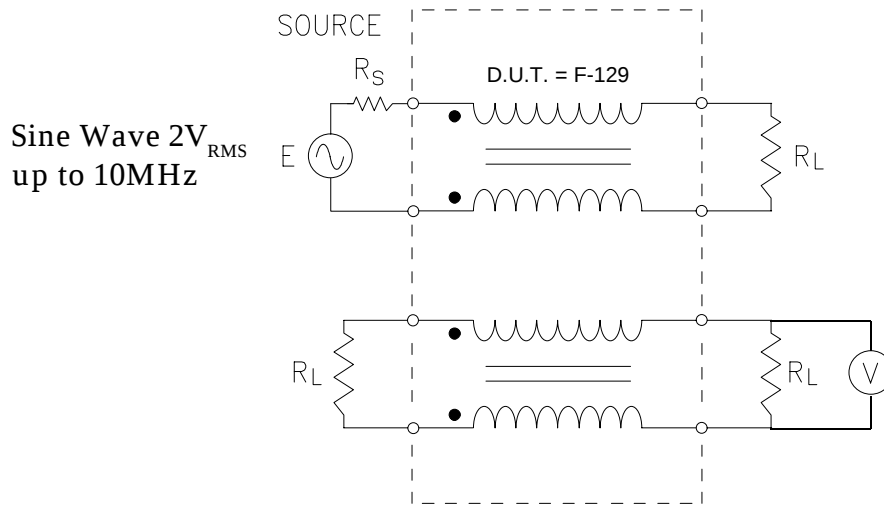


$$R_S = 50 \, \Omega$$

$$R_L = 135 \, \Omega$$

$$20 \log V/E$$

Longitudinal Conversion Loss

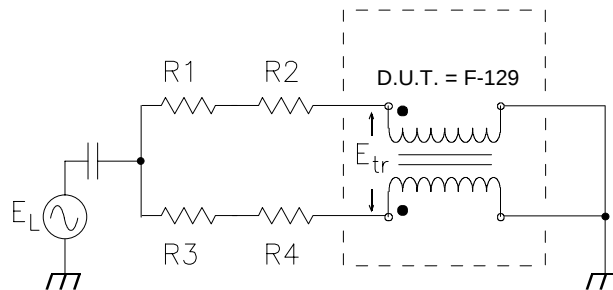

Resistors Matched to within 0.03%

$$R1 + R2 = 67.5 \, \Omega$$

$$R3 + R4 = 67.5 \, \Omega$$

$$20 \log E_L / E_{Tr}$$

RHOMBUS P/N: **F-129**

CUST P/N:

NAME:

DATE: **1/25/01**

SHEET: