

# High Frequency Data Line Filter P/N F-1516

50 mil Surface Mount Package

Low Profile 50 mil 16 Pin  
Transfer Molded Package  
Gullwing SMD




Filter Common &  
Differential Mode Noise

Frequency Range 1 - 200 MHz


EMI / RFI Suppression

500 V<sub>RMS</sub> Isolation

P/N F-1506 Typical Impedance Plot

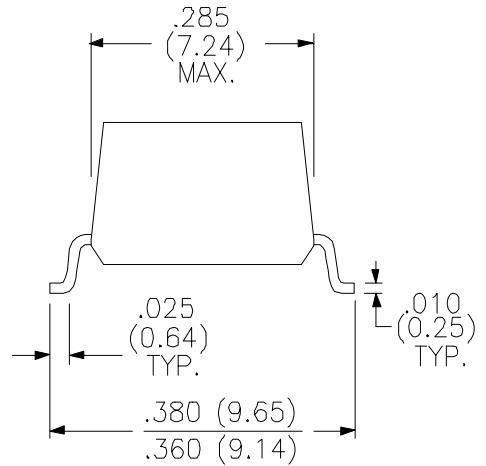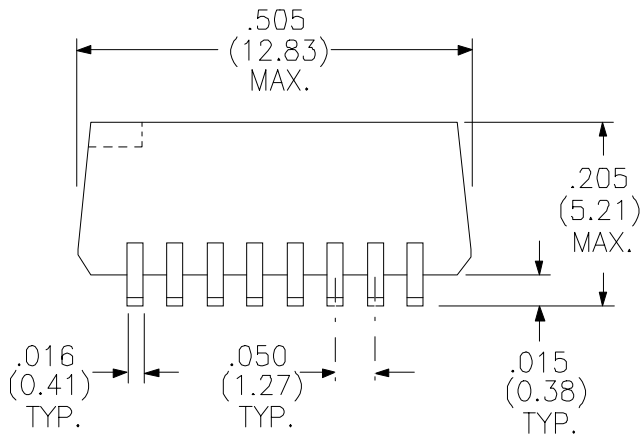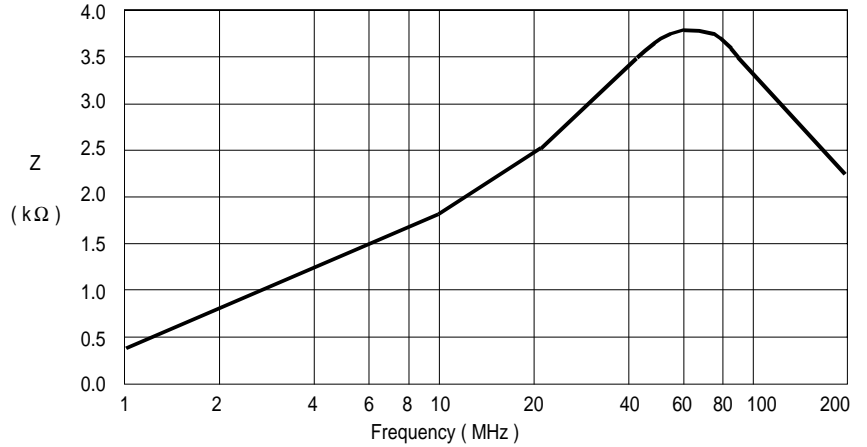

Schematic Diagram

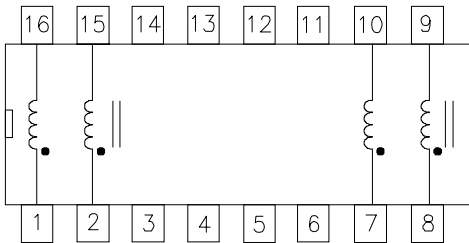

**TAPE AND REEL  
AVAILABLE**