


Low & Medium Power Common Mode Inductor

Horizontal Package Style

500 V_{RMS} Isolation







Electrical Specifications at 25°C

| Part Number | L ⁽¹⁾ ±25% (mH) | I ⁽²⁾ DC (Amps) | DCR Max (mΩ) | WEIGHT approx. (grams) |
|-------------|----------------------------------|----------------------------------|--------------------|------------------------------|
| L-11608L | 2.0 | 3.0 | 55 | 9 |

1. Test Frequency 10 KhZ - 100 mV
2. 40°C Temperature Rise

Physical Dimensions
inches (mm)

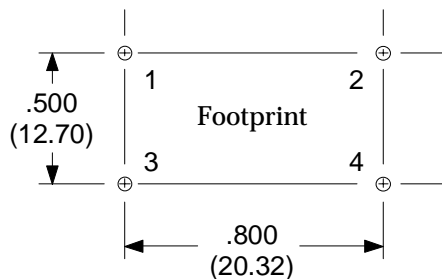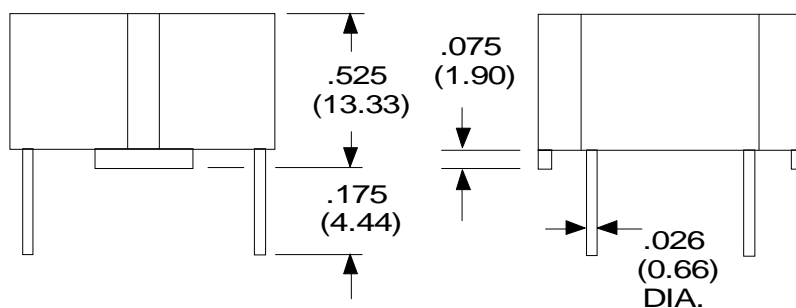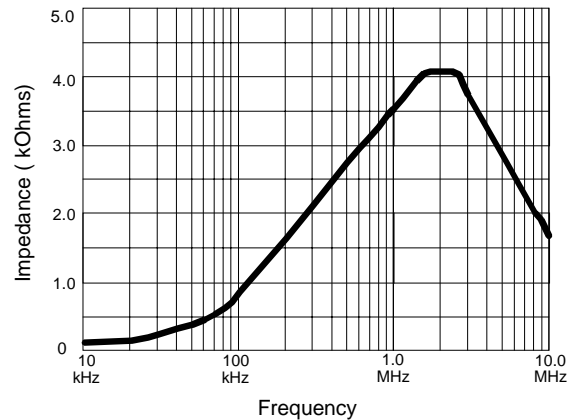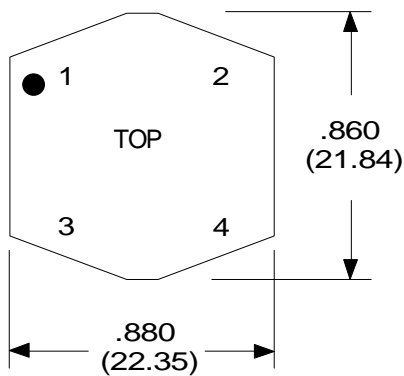

RHOMBUS P/N: **L-11608L**

CUST P/N:

NAME:

DATE: **03/19/03**

SHEET: