

Common Mode Inductor

Parameter	Min.	Max.	Units
Inductance *	33		mH
DCR		2.0	Ω
Current		0.4	A _{RMS}
Leakage Inductance *		330	μ H
Interwinding capacitance		12	pF
SRF	200 kHz Typ.		

* Inductance tested at 100mV_{RMS} and 1 kHz

Rated Voltage 250 VAC


Hipot (Isolation) 3750 VAC

Insulation Resistance 100M Ω


Temperature Rise 40°C Max.

Operating Temperature Range -40°C to +80°C

Schematic Diagram

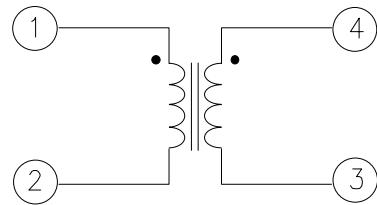

Physical Dimensions
inches (mm)

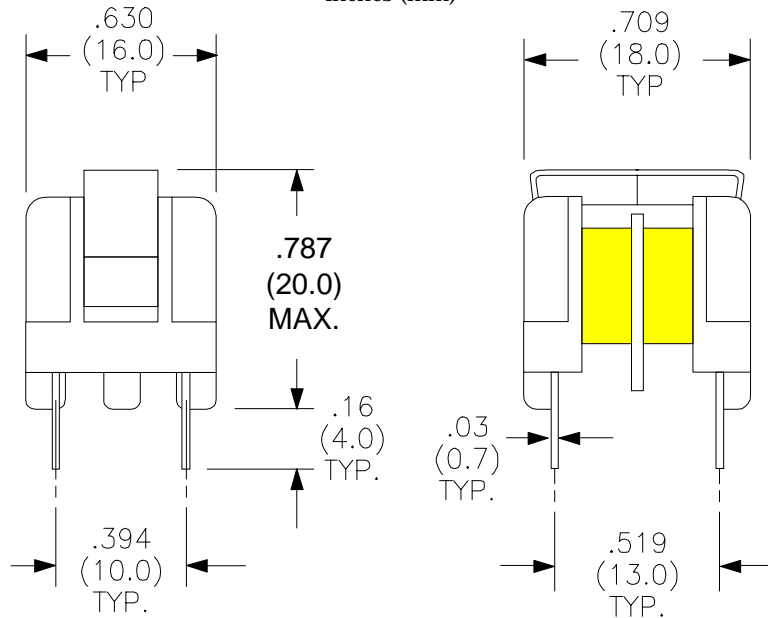

RHOMBUS P/N: **L-14212**

CUST P/N:

NAME:

DATE: **11/08/99**

SHEET: 1 OF 1