

Inductance	1.0	1.0	mm
DCR		0.2	Ω
Current		2.0	A _{RMS}
SRF	900 kHz Typ.		

*Inductance tested at 100mV_{RMS} and 10 kHz

Materials used in construction of this component meet or exceed UL Class B and can be operated up to 130°C

power supplies at input.

Windings balanced to 1%

Isolation 2500 V_{RMS}


Rated Voltage 250 VAC

Insulation Resistance 100M Ω



Temperature Rise 40°C Max.

Operating


Temperature Range -55°C to +85°C



Physical Dimensions
inches (mm)

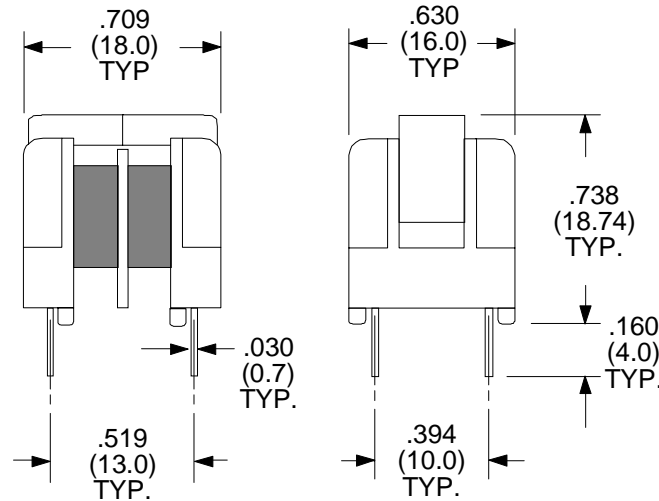

Style Schematic



RHOMBUS P/N: L-14261