

Parameter	Min.	Max.	Units
Inductance*	19		mH
DCR		2.0	Ω
Current		0.5	A _{RMS}
Leakage Inductance*		400	μ H
Interwinding capacitance		10	pF
SRF	300 kHz Typ.		

*Inductance tested at 100mV_{RMS} and 10 kHz

Rated Voltage 250 VAC

Hipot (Isolation) 3000 VAC


Insulation Resistance 100M Ω

Temperature Rise 40°C Max.


Operating

Temperature Range -20°C to +115°C

Schematic
Diagram

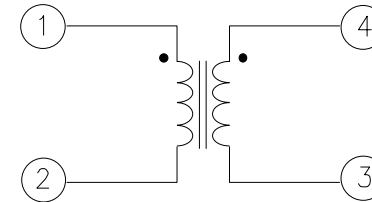

Physical Dimensions
inches (mm)

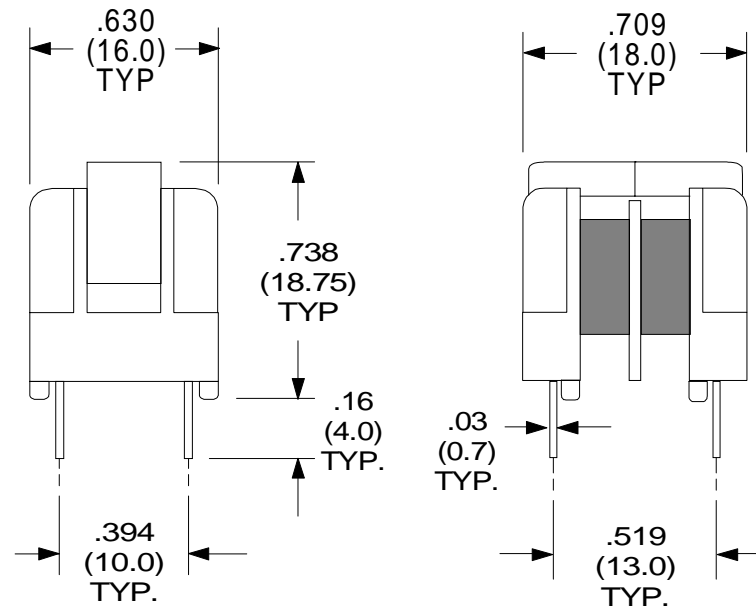

RHOMBUS P/N: **L-14263**