

Common Mode Inductor

Parameter	Min.	Max.	Units
Inductance*	5.0		mH
DCR		250	mΩ
Current		1.2	A _{RMS}
Leakage Inductance*		42	μH
Interwinding capacitance		8	pF
SRF	580 kHz Typ.		

*Inductance tested at 100mV_{RMS} and 10 kHz

Rated Voltage 250 VAC

Hipot (Isolation) 3000 VAC


Insulation Resistance 100MΩ

Temperature Rise 40°C Max.


Operating

Temperature Range -20°C to +115°C

Schematic
Diagram

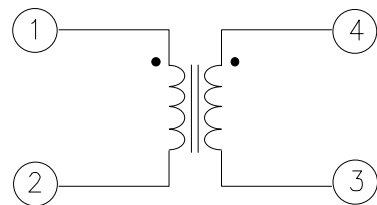

Physical Dimensions
inches (mm)

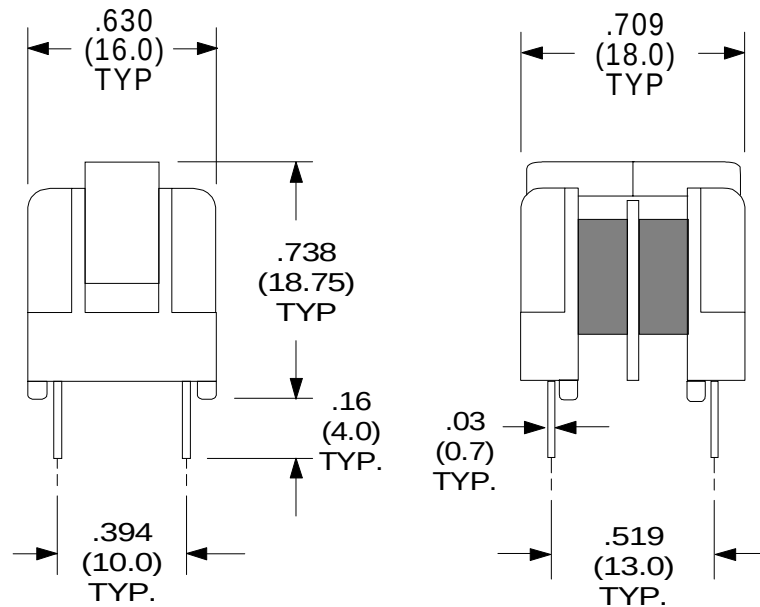

RHOMBUS P/N: **L-14264**

CUST P/N:

NAME:

DATE: **4/22/02**

SHEET: 1 OF 1