

# Bead Inductors

Designed for use in attenuating EMI and other unwanted High Frequency Noise without contributing to Power Loss.




Impedance graph is for typical response over frequency

Electrical variations of the listed part numbers are available.

Lead Wire is #24 AWG tinned copper

Bulk packaging

Nominal Package Dimensions		
Outside Diameter	Body Length	Lead Length
.236"	.394"	.394"

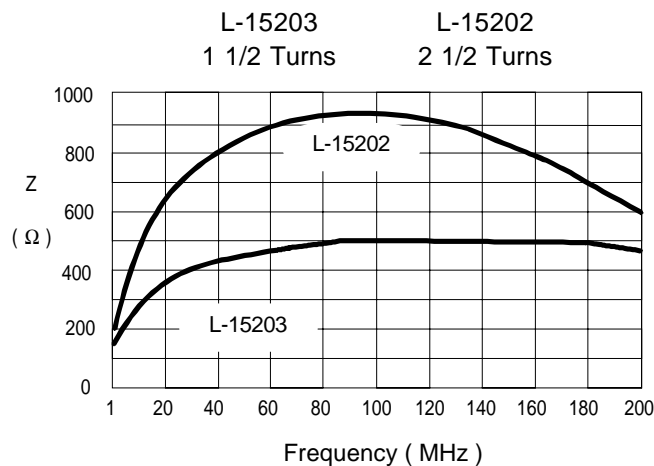

Material: 43 Fair-Rite  
850  $\mu_i$

RHOMBUS P/N: L-15202 - L-15203	
CUST P/N:	NAME:
DATE: 7/30/99	SHEET: 1 OF 1