


Surface Mount Self-Leaded Inductor


Electrical Specifications at 25°C. Operating Temp. Range: -30°C to +130°C

Part Number	L ⁽¹⁾ with DC (μ H)	I _{DC} ⁽¹⁾ (Amps)	E-T ⁽¹⁾ Product (V- μ s)	L typ. No DC \pm 20% (μ H)	DCR max. (m Ω)
L-15322	2.5	11.4	2.23	4.20	5.4



Schematic Diagram

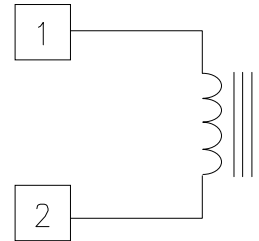

- 1) Typical values for a 55°C Temperature rise. At 500 kHz and E-T value above, the core loss is 10 % of copper loss.

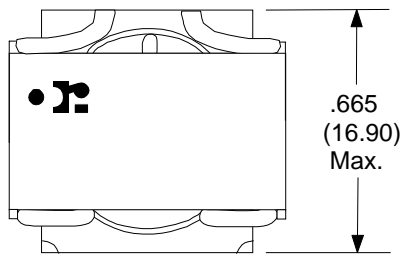

All dimensions in inches (mm):

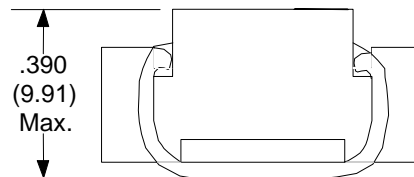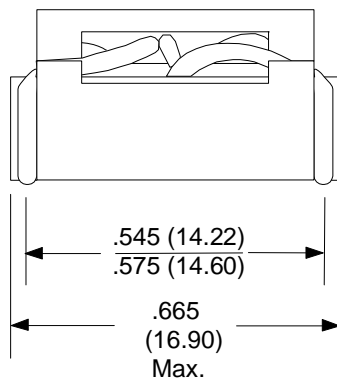

RHOMBUS P/N: L-15322

CUST P/N:

NAME:

DATE: 7/30/00

SHEET: 1 OF 1