


# 50 KHz SMPS Inductor - Toroid Mount Package


Electrical Specifications at 25°C

Parameter	Min.	Typ.	Max.	Units
Inductance (No DC) tested at 10mV <sub>RMS</sub> @ 20 kHz (0 ADC)	104		156	μH
Inductance with DC <sup>(1)</sup>		150		μH
DCR			0.10	Ω
Energy Storage		675		μJ
Lead Diameter		.025		inches

Schematic Diagram



1) Typical value for Operating E-T Product of 200 V-μs and IDC = 3 Amps.

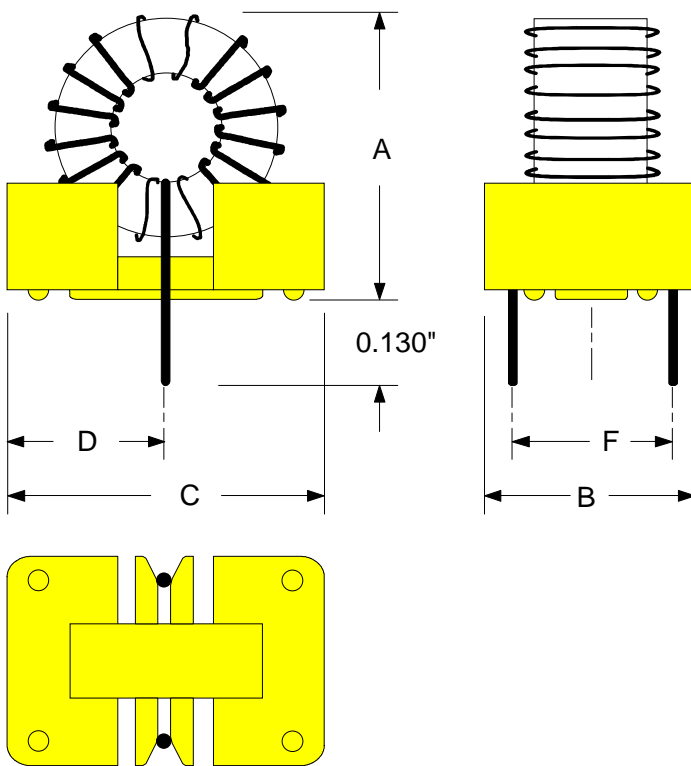

Physical Dimensions  
inches (mm)

	Min.	Typ.	Max.
A		.95 (24.1)	
B	.590 (14.99)		.610 (15.49)
C		.950 (24.1)	
D		.475 (12.07)	
F		.450 (11.43)	

RHOMBUS P/N: L-20510

CUST P/N:

NAME:

DATE: 09/08/99

SHEET: 1 OF 1