

Common Mode Choke


Turns Ratio **1 : 1**

Parameter	Min.	Typ.	Max.	Units
Inductance ⁽¹⁾		11.0		mH
DCR (1-2) or (4-3)		1.45		Ω
Leakage Inductance ⁽¹⁾		165		μ H
Interwinding Capacitance ⁽¹⁾		5.00		pF
Breakdown Voltage	1500			VDC
Current		0.250		Amp
SRF	490			kHz




Materials used in construction of this component meet or exceed UL Class F (155°C)

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Schematic Diagram

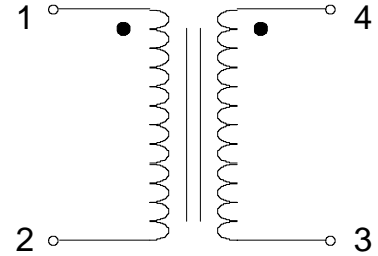

1. tested at 1 kHz and 100mV_{RMS}

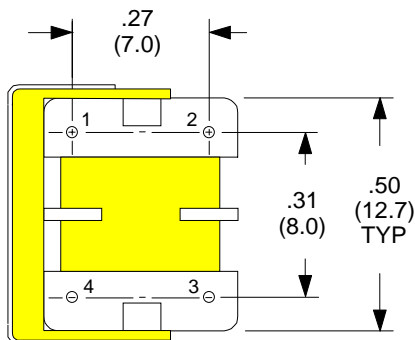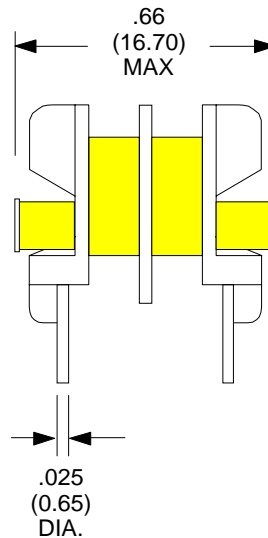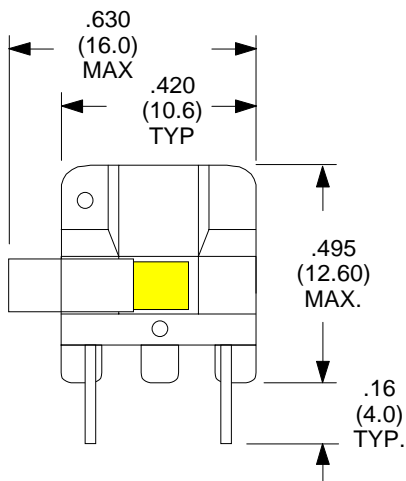

Physical Dimensions
inches (mm)

RHOMBUS P/N: **L-299**

CUST P/N:

NAME:

DATE: **2/26/98**

SHEET: 1 OF 1