

Common Mode Choke


Turns Ratio 1 : 1

Parameter	Min.	Typ.	Max.	Units
Inductance ⁽¹⁾		1.60		mH
DCR (1-2) or (4-3)		0.40		Ω
Leakage Inductance ⁽¹⁾		30.5		μ H
Interwinding Capacitance ⁽¹⁾		1.5		pF
Breakdown Voltage	1500			VDC
Current		0.500		Amp
SRF	1000			kHz




Materials used in construction of this component meet or exceed UL Class F (155°C)

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Schematic Diagram

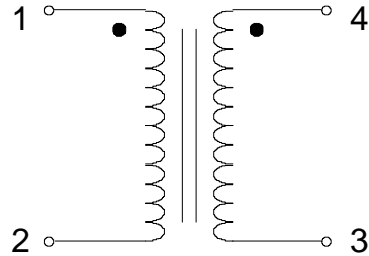

1. tested at 1 kHz and 100mV_{RMS}

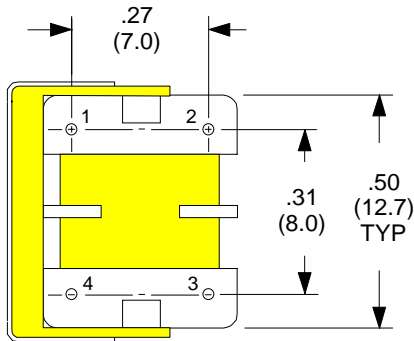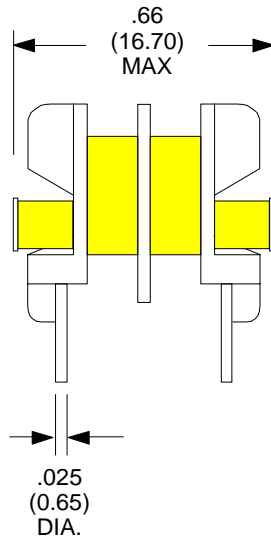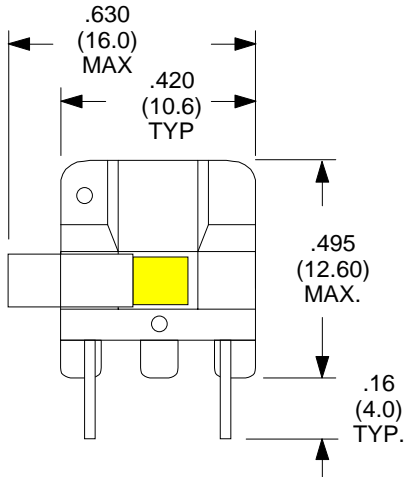

Physical Dimensions
inches (mm)

RHOMBUS P/N: **L-300**

CUST P/N:

NAME:

DATE: **2/26/98**

SHEET: 1 OF 1