

DUAL INDUCTOR

URNS RATIO 1:1 ± 1%


PARAMETER	MIN	MAX	UNITS
Inductance	63		mH
Leakage Inductance		4.0	μH
DCR		2.44	Ω
Isolation	500		V _{RMS}

Test Conditions:


Inductance tested at 1 kHz and 100 mVAC

Leakage Inductance tested at 10 kHz and 100 mVAC

PHYSICAL DIMENSIONS All dimensions in inches (mm):

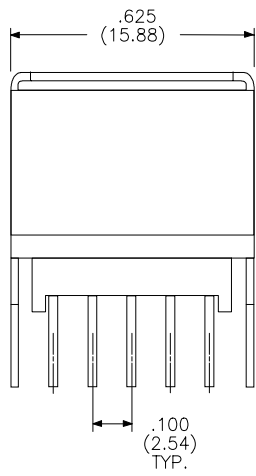


Pin Diameter is 0.025 (0.64)

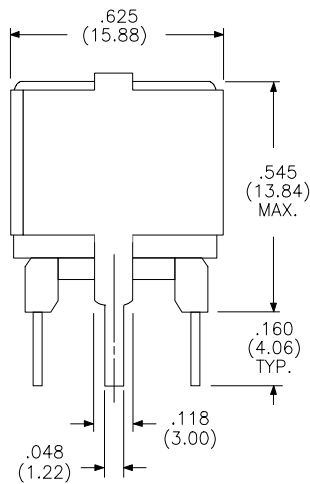


PIN POSITION GRID 0.100 (2.54)


● HOLES FOR BOBBIN PINS



Bottom View

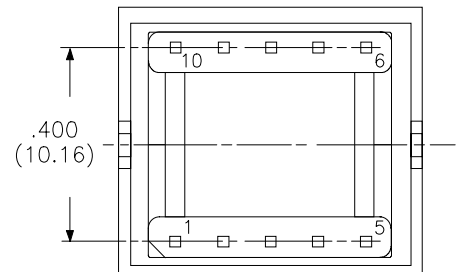

**SCHEMATIC
DIAGRAM:**

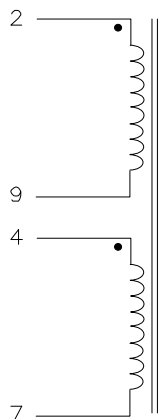

**RHOMBUS INDUSTRIES INC.
FSCM NO. 16714**

RHOMBUS P/N: L-332

CUST P/N:

NAME:

DATE: 10/24/97

SHEET: 1 OF 1