

Common Mode Choke


Turns Ratio		1 : 1		
Parameter	Min.	Typ.	Max.	Units
Inductance ⁽¹⁾	49	70	105	mH
DCR (1-8) or (4-5)		2.80		Ω
Leakage Inductance ⁽²⁾		900		nH
Breakdown Voltage	500			VDC

Materials used in construction of this component meet or exceed UL Class F (155°C)


Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

1. Inductance tested at 10 kHz and 100mV_{RMS}
2. Tested at 100 kHz and 100mV_{RMS}

Schematic Diagram

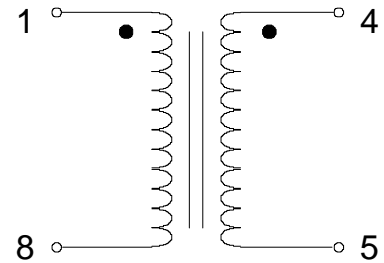

Physical Dimensions
inches (mm)

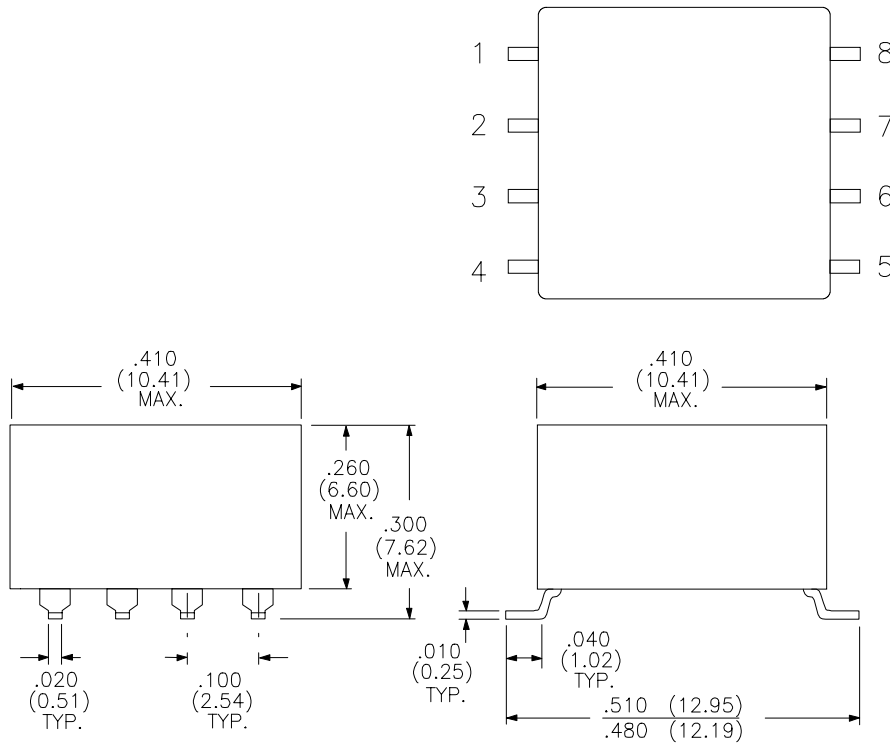

RHOMBUS P/N: L-363

CUST P/N:

NAME:

DATE: 2/26/98

SHEET: 1 OF 1