

Common Mode Choke


Turns Ratio		1 : 1		
Parameter	Min.	Typ.	Max.	Units
Inductance ⁽¹⁾	2.4	5.0		mH
DCR		0.035	0.050	Ω
Current		2.0	3.0	Amps
Leakage Inductance ⁽²⁾		10		μH
Breakdown Voltage	200			VDC
SRF	500			kHz

1. Inductance tested at 1 kHz and 100mV_{RMS}
2. Tested at 100 kHz and 100mV_{RMS}


Materials used in construction of this component meet or exceed UL Class F (155°C)

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


Schematic Diagram



Physical Dimensions
inches (mm)

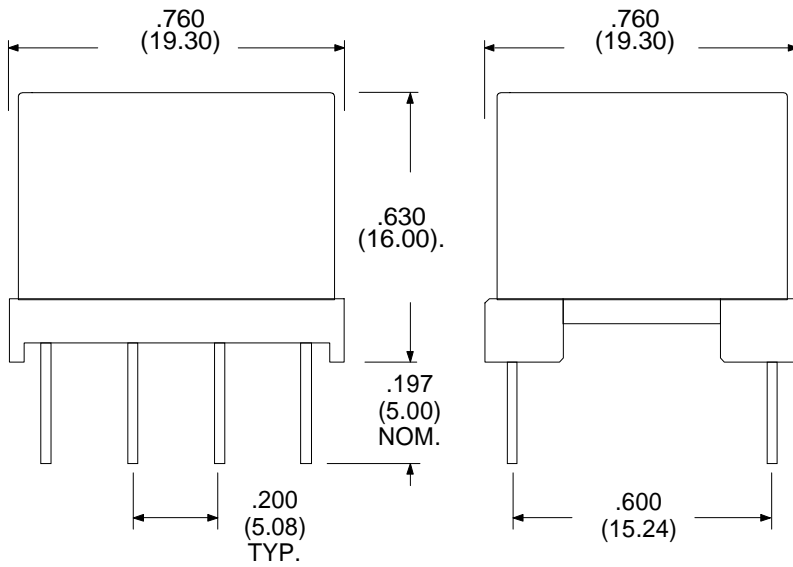


Pin Diameter is 0.026 (0.66)



DOT INDICATES PIN #1

Pin Position Grid
0.100 (2.54)

● Holes For Bobbin Pins

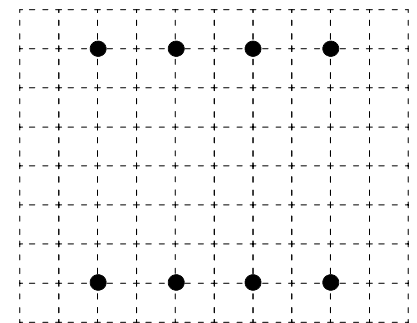

RHOMBUS P/N: **L-375**

CUST P/N:

NAME:

DATE: **5/5/98**

SHEET: 1 OF 1