


# INDUCTOR

Electrical Specifications at 25°C


Parameter	Min.	Typ.	Max.	Units
Inductance (Pins 1-5) <sup>1,2</sup>		250		μH
Rated Current		1.5		Amps DC
DCR		.230		Ω
E.T.op <sup>3</sup>			72.6	VμSec

## Schematic Diagram



1. Tested at 100 mV, 10 kHz
2. Inductance values may vary  $\pm 20\%$
3. E.T. operated at 150 kHz

## Dimensions inches (mm)

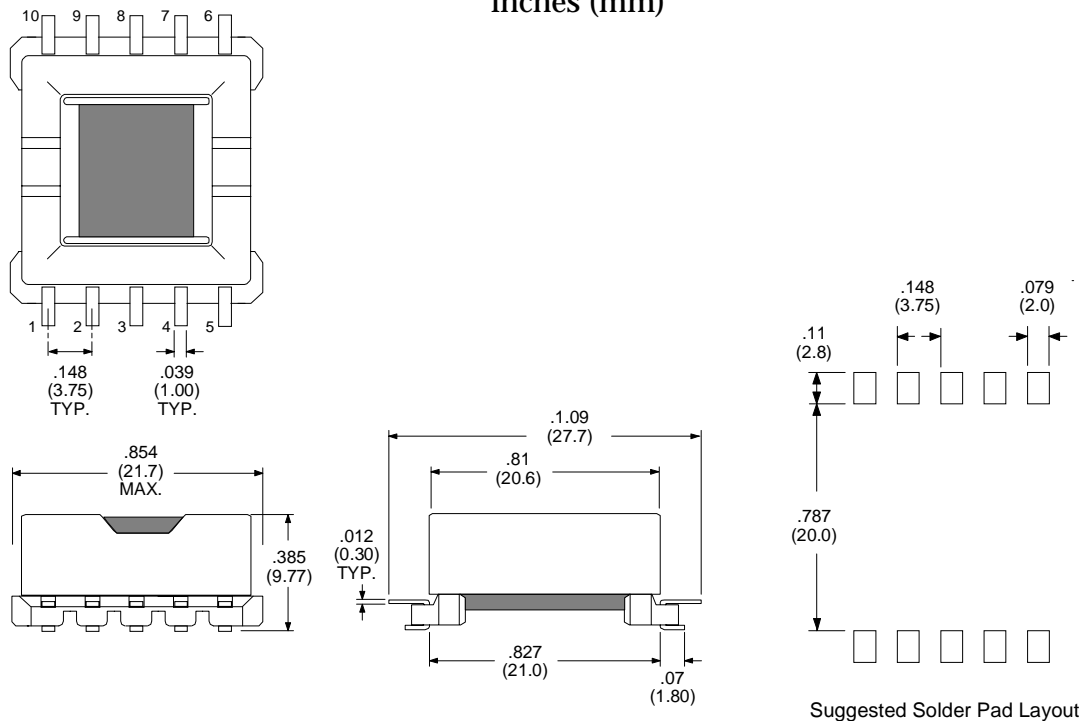

UNUSED PINS OMITTED

RHOMBUS P/N: L-378

CUST P/N:

NAME:

DATE: 9/22/98

SHEET: 1 OF 1