


# Common Mode Choke

Parameter	Min.	Max.	Units
Inductance <sup>1</sup>	500		$\mu\text{H}$
DCR		1.0	$\Omega$
Current @500 cm/A		0.032	$A_{\text{RMS}}$
Leakage Inductance		35	$\mu\text{H}$
Interwinding Capacitance		15	pF
SRF		3.8	MHz

Hipot (Isolation) 1500 VAC


Operating Temperature Range -25°C to +60°C

Schematic Diagram

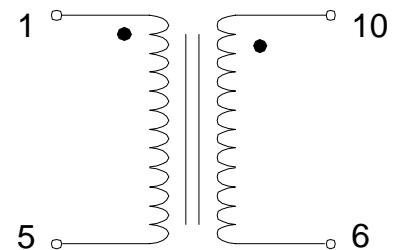

1. Inductance tested at  $100\text{mV}_{\text{RMS}}$  and 10 kHz

Physical Dimensions  
inches (mm)

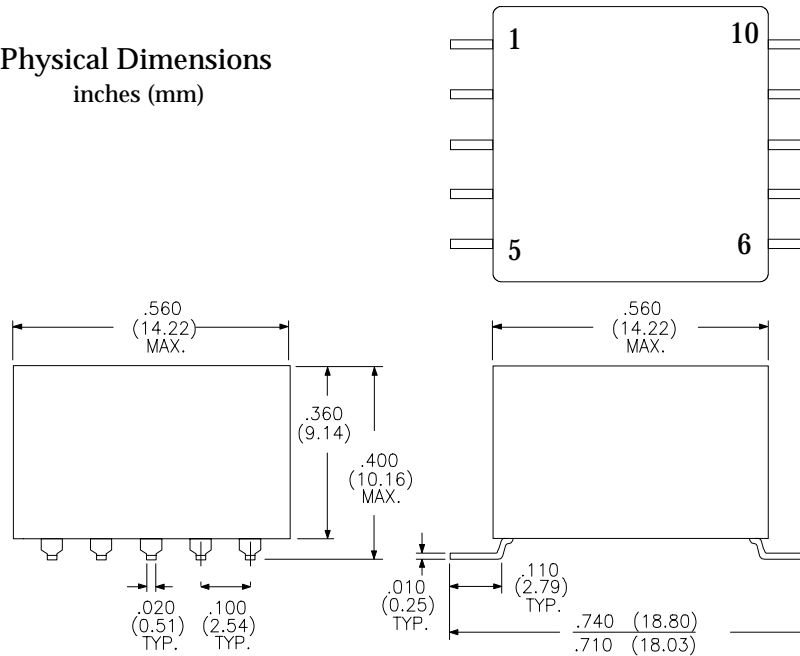

RHOMBUS P/N: **L-45071**

CUST P/N:

NAME:

DATE: **3/28/00**

SHEET: 1 OF 1