


Semi-Encapsulated Toroidal Inductor

Electrical Specifications at 25°C

Parameter	Min.	Typ.	Max.	Units
Inductance ⁽¹⁾	45	50	55	μH
DCR			.035	mΩ
Rated Current, I _{DC} ⁽²⁾			3.93	ADC
SRF	4.0			MHz


1. Inductance measured at 10 kHz / 1V
2. Rated for 40°C temperature rise.

Schematic
Diagram



Materials used in construction of this component meet or exceed UL Class B and can be operated up to 130° C.

Physical Dimensions
inches (mm)

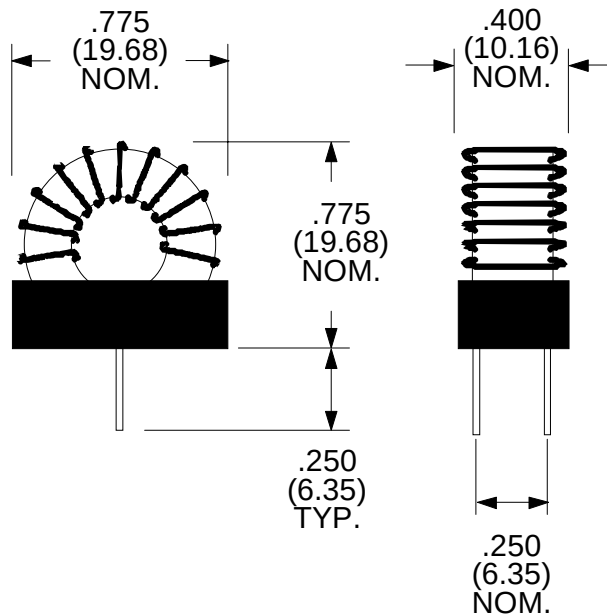

RHOMBUS P/N: L-471

CUST P/N:

NAME:

DATE: 7/6/99

SHEET: 1 OF 1