


VERTICAL MOUNTED TOROID

Parameter	Min.	Typ.	Max.	Units
Inductance *	4.11	4.84	5.56	μH
DCR			.010	Ω

Materials used in construction of this component meet or exceed UL Class B and can be operated up to 130°C.

* Inductance tested at 10Khz - 0.1V

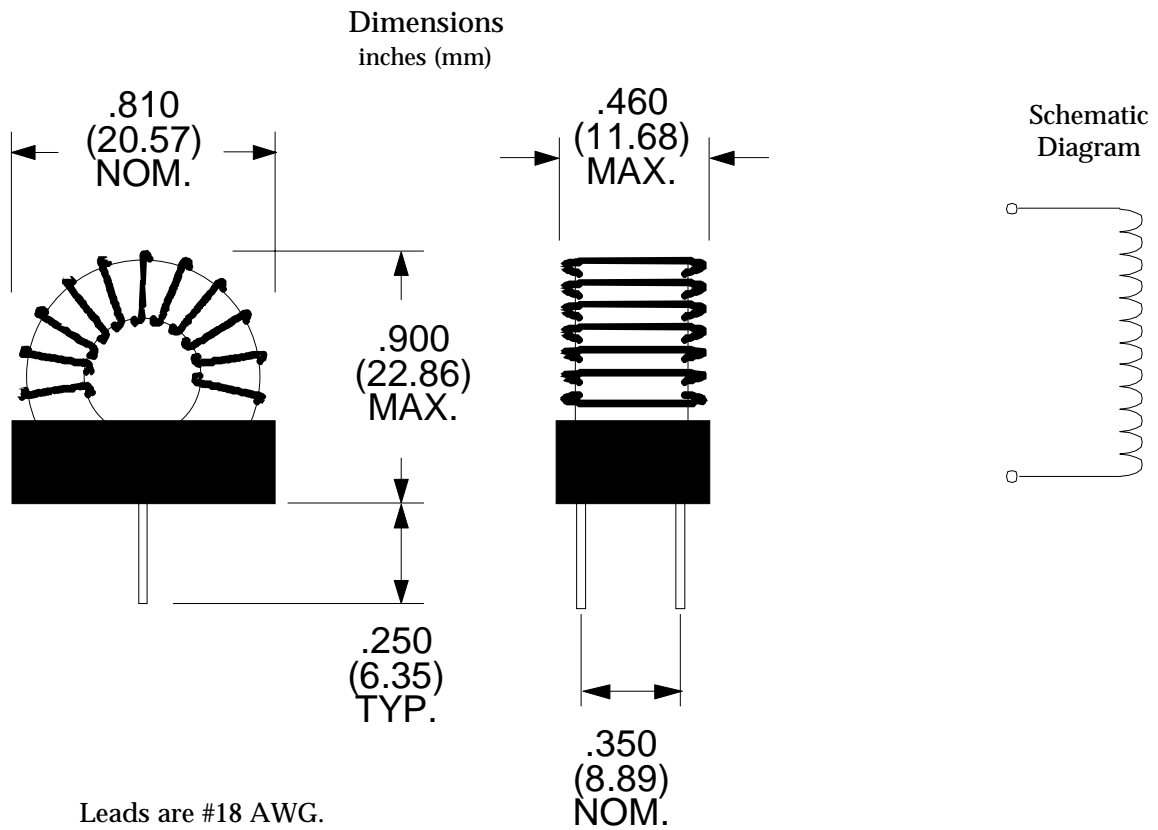

RHOMBUS P/N: L-497	
CUST P/N:	NAME:
DATE: 7/20/99	SHEET: 1 OF 1