

Slug Inductors

High Current Per Volume

Designed for Noise, Spike & Filtering applications.

Electrical Specifications at 25°C

Part Number	L Nom. (μH)	DCR Nom. (mΩ)	I Max. (A)
L-500	10	7.1	14.0

Applications

Power Supplies

Filters

SCR and Triac Controls

OEM Equipment

Telephones


TV, CRT'S, VCR'S

Appliances

Coils finished with UL rated varnish.

Variations on electrical parameters of parts listed are available - Please contact factory.


Physical Dimensions inches (mm)

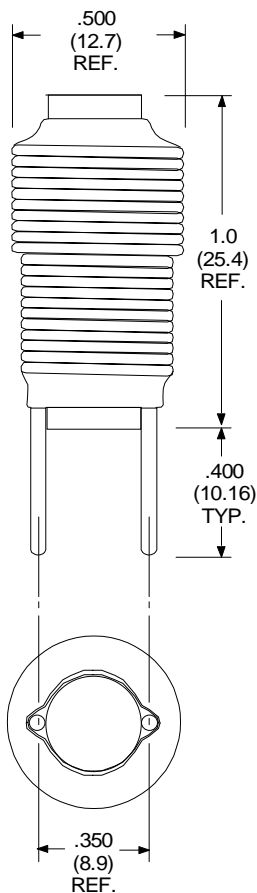

Height dimensions are without solder joint or coatings

LEADS ARE #16 AWG

Schematic Diagram



RHOMBUS P/N: L-500

CUST P/N:

NAME:

DATE: 8/3/99

SHEET: 1 OF 1