


# Surface Mount Self-Leaded Inductor

Electrical Specifications at 25°C. Operating Temp. Range: -30°C to +130°C


Part Number	L <sup>(2)</sup> with DC (μH)	I <sub>DC</sub> (Amps)	E-T <sup>(1)</sup> Product (V-μs)	L typ. No DC ± 20% (μH)	DCR Typ. (Ω)
L-515	230	1.7	139	390	.340

- 1) Rating for 15°C rise due to core loss, tested at 50 kHz.
- 2) Tested at 10 kHz - 1V and 1ADC

## Schematic Diagram



## Physical Dimensions inches (mm)

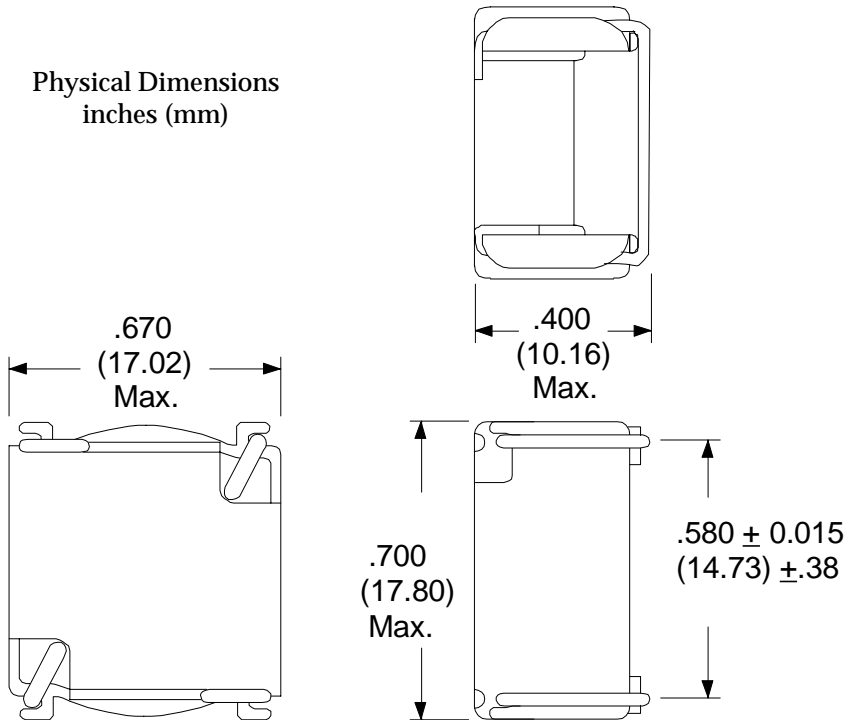

RHOMBUS P/N: L-515

CUST P/N:

NAME:

DATE: 8/09/99

SHEET: 1 OF 1