

Radial Lead Mini Inductor

HIGH INDUCTANCE - LOW CURRENT

Designed for Noise, Spike & Filtering applications.

Coil finished with UL rated varnish.



Variations on electrical parameters of part listed are available - Please contact factory.

Electrical Specifications at 25°C.

Part Number	L ¹ ±25% (μH)	Rated Current (Amps)	DCR max. (mΩ)
L-61114	56	0.550	250

1. Tested at 1 kHz & 100 mV

Schematic Diagram

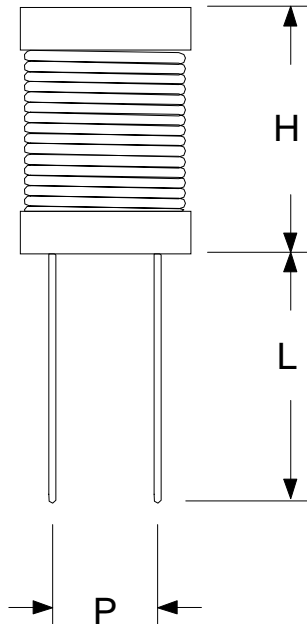

Height dimensions are without solder joint or coatings

LEADS ARE #22 AWG

Size Code	Reference Dimensions in Inches (mm)			
	H	DIA.	P	L
A	.30 (7.5)	.24 (6.0)	.13 (3.3)	.79 (20.0)

RHOMBUS P/N: L-61114	
CUST P/N:	NAME:
DATE: 11/02/02	SHEET: 1 OF 1