

Power Choke Inductors

Designed for Noise, Spike & Filtering applications.

Electrical Specifications at 25°C

Part Number	L ⁽¹⁾ (μ H)	DCR (Ω)	I Max. (A)
L-61207ST	330	0.65	0.49

1. Tested at 10 kHz & 0.1 V_{RMS}


Applications

Power Supplies
Filters
SCR and Triac Controls
OEM Equipment
Telephones
TV, CRT'S, VCR'S
Appliances


Coils finished with UL rated
Polyoefin Shrink Tube.

Variations on electrical
parameters of parts listed
are available - Please contact factory.

Physical Dimensions inches (mm)

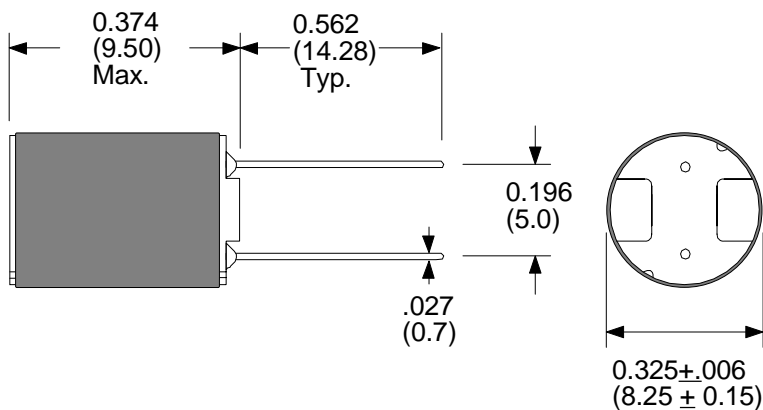

Schematic Diagram



RHOMBUS P/N: L-61207ST

CUST P/N:

NAME:

DATE: 01/24/02

SHEET: 1 OF 1