

T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Turns Ratio (± 5%) 1:2CT & 1:1.36

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.2		mH
Leakage Inductance		0.5&0.8	μH
Capacitance (C _{ww})		35	pF
Primary DC Resistance		0.8	ohms
Secondary DC Resistance		1.8	ohms
ET Product	10		VμS

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


1500 V_{RMS} Isolation (Hi-Pot)

Parts shipped in anti-static tubes. 33 pieces per tube

Surface mount version of this part available. Part# T-11049


Primary Pins 14-12 & 5-7

PHYSICAL DIMENSIONS All dimensions in inches (mm):

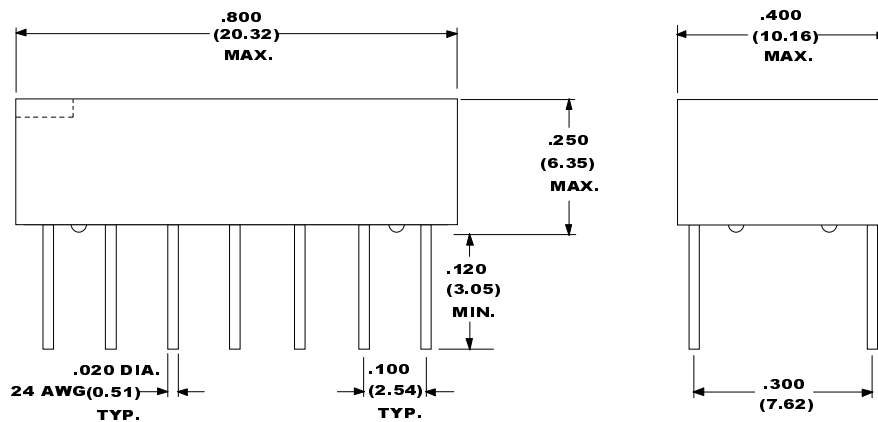

Unused pins not provided

SCHEMATIC DIAGRAM:

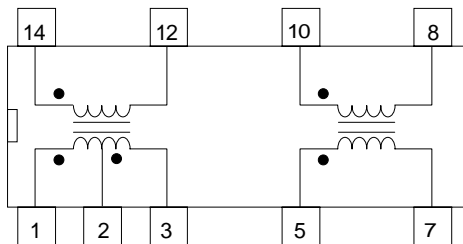

RHOMBUS P/N: T-10149	
CUST P/N:	NAME:
DATE: 2/23/98	SHEET: 1 OF 1