

T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Turns Ratio ($\pm 5\%$)

1:1.15CT & 1:2CT

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.5 & 1.2		mH
Leakage Inductance		0.6	μ H
Capacitance ($C_{w/w}$)		40	pF
Primary DC Resistance		0.7	ohms
Secondary DC Resistance		0.9 & 1.1	ohms
ET Product	10		V μ S

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


1500 V_{RMS} Isolation (Hi-Pot)

Parts shipped in anti-static tubes. 33 pieces per tube


Surface mount version of this part available. Part# T-11058

Primary Pins 14-12 & 5-7

PHYSICAL DIMENSIONS All dimensions in inches (mm):

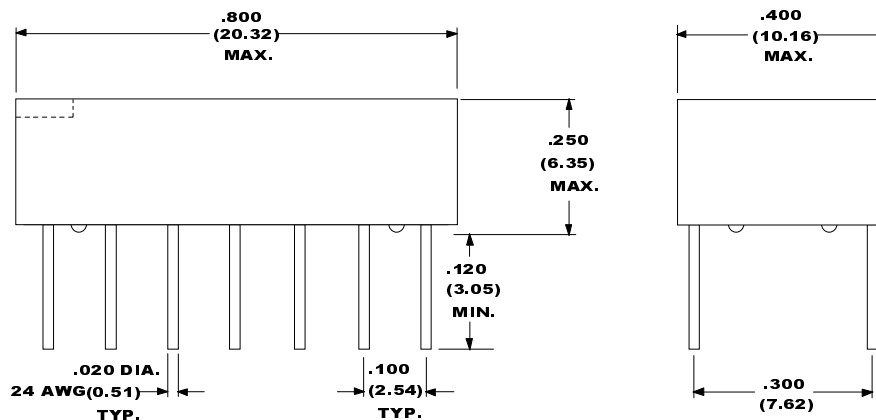

SCHEMATIC DIAGRAM:

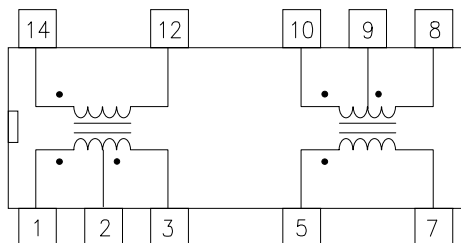

Unused pins not provided

RHOMBUS P/N: **T-10158**

CUST P/N:

NAME:

DATE: **2/23/98**

SHEET: **1 OF 1**