

T1 Transformer


Turns Ratio $\pm 2\%$ (Pin 6-4 : Pin 1-3) 2.42 : 1

PARAMETER	MIN.	MAX.	UNITS
Primary Inductance ⁽¹⁾ Pins 6-4	2.3		mH
Leakage Inductance Pins 6-4 Pins 1-3 Shorted		2.0	μ H
Interwinding Capacitance ⁽¹⁾		25	pF
DC Resistance (Pin 1-3)		0.23	ohms
DC Resistance (Pin 6-4)		.60	ohms
Isolation (Hi-Pot) 6 to 1	1500		V _{RMS}

1. Tested at 100 KHz & 100 mV

Designed to accommodate PMC PM4351

Schematic Diagram

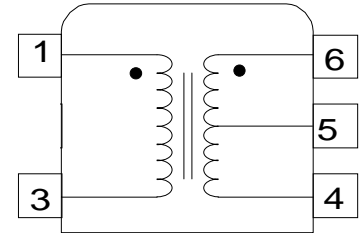


Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Parts shipped in anti-static tubes. 50 pieces per tube

Surface mount available
Part number T-10356

Physical Dimensions inches (mm)

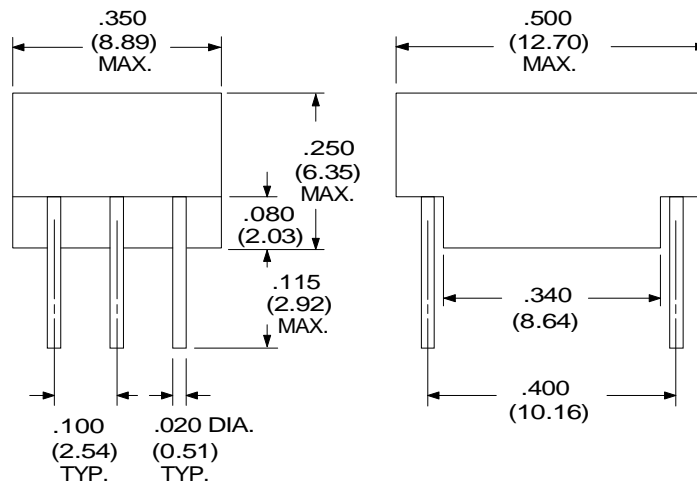

RHOMBUS P/N: T-10256

CUST P/N:

NAME:

DATE: 10/20/99

SHEET: 1 of 1