

20 WATT PUSH-PULL


URNS RATIO 1:1:2:2 (1,11 : 2,12 : 8,6 : 7,5)

PARAMETER	MIN.	MAX.	UNITS
*Primary Inductance (Pins 8 + 5 short 6 + 7)	27		mHy
**Primary Leakage Inductance (Pins 1 + 12 short 11 + 2 & 6,7,8,5)		10	μHy
DC Resistance (1-11, 2-12)		0.5	ohms
DC Resistance (8-6,7-5)		1.0	ohms
Isolation (Hi-Pot)	1000		V _{RMS}


*Tested at 1kHz 100Mv

**Tested at 10kHz 10Mv


SCHEMATIC DIAGRAM:

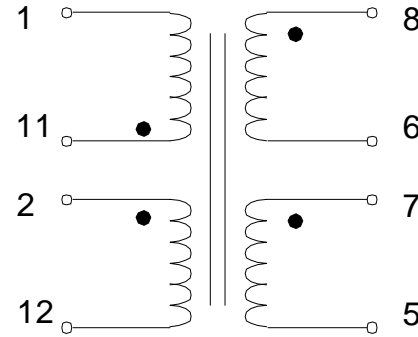

TRUE POSITION GRID
(P.C. PATTERN COMPONENT SIDE)
0.100 Inch (25.4 mm) Grid

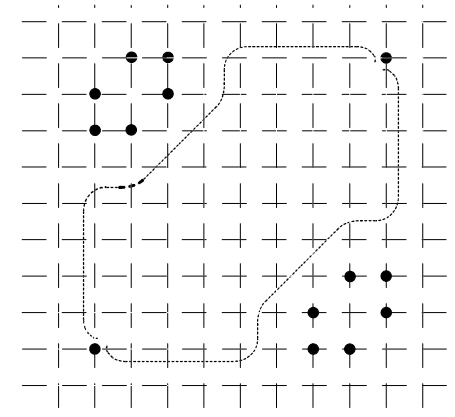

PHYSICAL DIMENSIONS All dimensions in inches (mm):

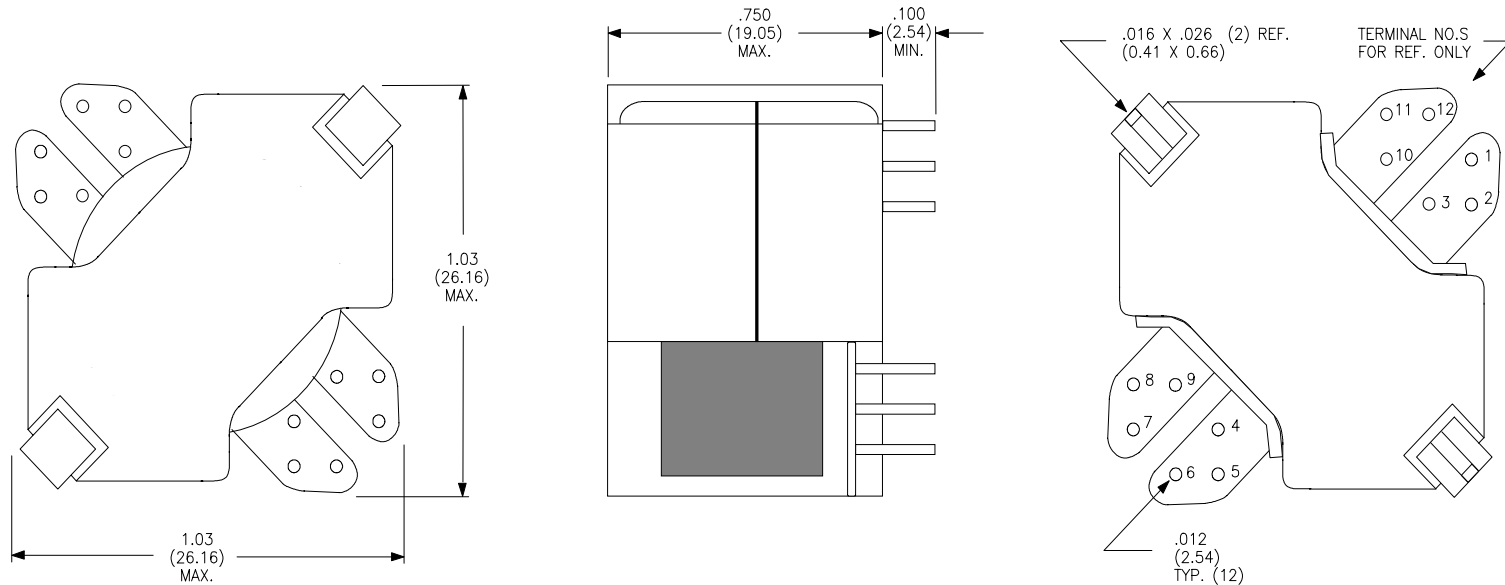

15801 Chemical Lane,
Huntington Beach, CA 92649-1595
Phone: (714) 898-0960 • FAX: (714) 896-0971

FSCM
No. 16714

Rhombus P/N: T-1033

Cust. P/N:

Name:

Date: 10/22/95

Sheet: