

10BASE-T/ETHERNET ISOLATION TRANSFORMER

Turns Ratio ($\pm 5\%$)

1:1

TRIPLE STYLE

(3 Transformers per Package)

IEEE 802.3 (10 BASE 2, 10 BASE 5)
& ECMA Compatible

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Parts shipped in anti-static tubes. 19 pieces per tube

PARAMETER	MIN.	MAX.	UNITS
Open Circuit Inductance	200	300	μ Hy
Leakage Inductance		0.25	μ Hy
Interwinding Capacitance ($C_{W/W}$)		15	pF
Rise Time		3.5	ns
ET	3.5		V μ S
Primary DC Resistance		0.4	ohms
Secondary DC Resistance		0.4	ohms
High Potential Test	2000		V _{RMS}

Test Conditions:


Oscillation Voltage = 20mV

Oscillation Frequency = 100.0 KHz


*SMD versions
available on
Tape & Reel*

PHYSICAL DIMENSIONS

All dimensions in inches (mm):

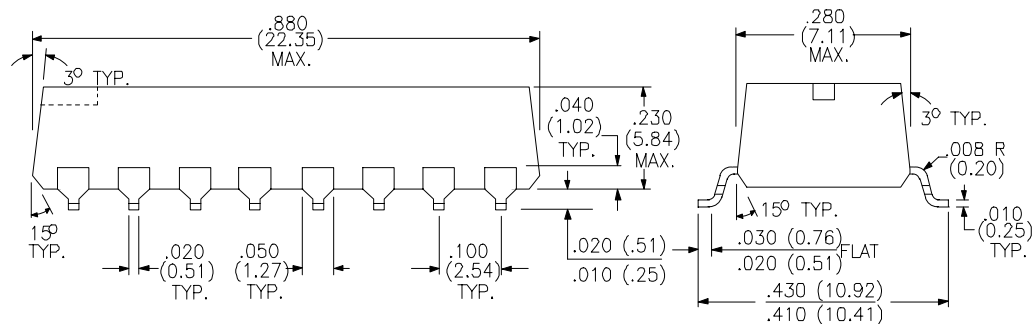

SCHEMATIC DIAGRAM:

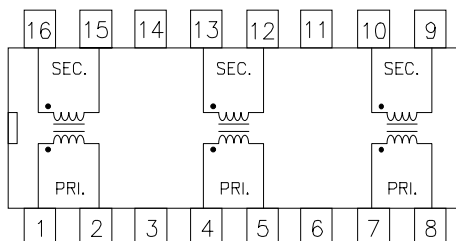

RHOMBUS P/N: **T-10908G**

CUST P/N:

NAME:

DATE: 07/02/98

SHEET: 1 OF 1