

T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Turns Ratio (± 5%)

1:1.15CT & 1:2CT

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.5 & 1.2		mH
Leakage Inductance		0.6	μH
Capacitance (C_{ww})		40	pF
Primary DC Resistance		0.7	ohms
Secondary DC Resistance		0.9 & 1.1	ohms
ET Product	10		VμS

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


1500 V_{RMS} Isolation (Hi-Pot)

Parts shipped in anti-static tubes. 21 pieces per tube


Tape and Reel available.

Primary Pins 14-12 & 5-7

PHYSICAL DIMENSIONS All dimensions in inches (mm):

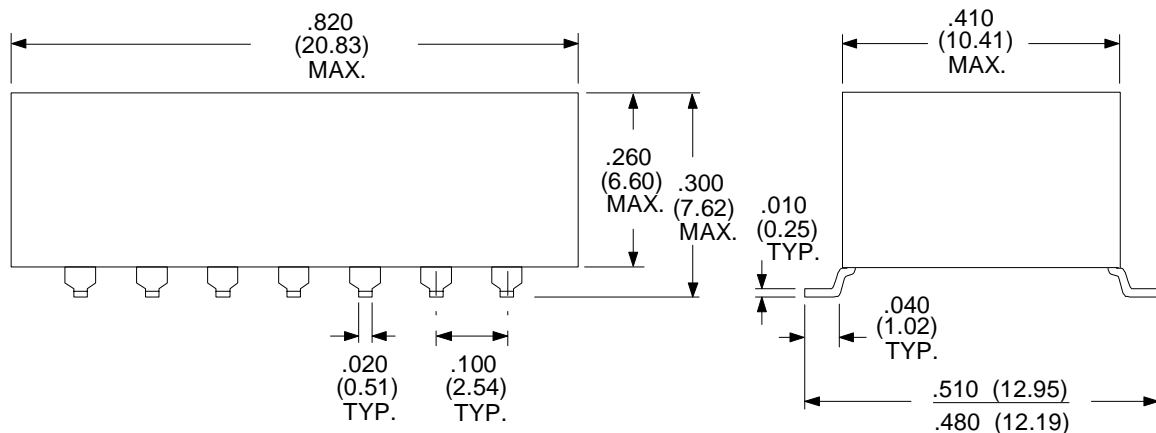

SCHEMATIC DIAGRAM:

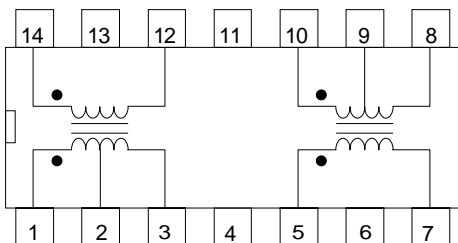

RHOMBUS P/N: **T-11058**

CUST P/N:

NAME:

DATE: **2/23/98**

SHEET: 1 OF 1