


ADSL Transformer

Reinforced Insulation Per EN 41003/EN 60950


Turns Ratio (± 3 %)	1.4 : 1
-----------------------	---------

PARAMETER	MIN.	MAX.	UNITS
Primary Inductance ¹ Pins 1-4 with 2 & 3 shorted.	895	1200	μH
Secondary Inductance Pins 10-7 with 8 & 9 shorted.	453	550	μH
Leakage Inductance		15	μH
Interwinding Capacitance		20	pF
Primary DC Resistance Pins 1-3 or 2-4		0.4	ohms
Secondary DC Resistance Pins 10-8, or 9-7		0.4	ohms
Isolation (Hi-Pot)	3000		V _{RMS}
DC Bias		2	mA

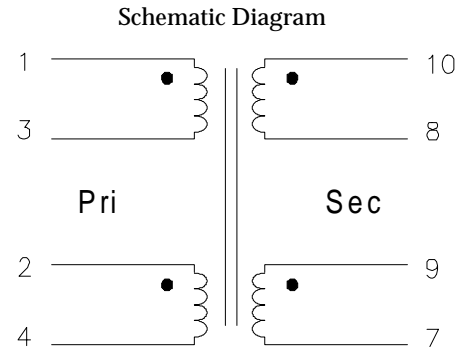

**This part is available in
Surface Mount.
Add Suffix "G"
to part number.**

**Physical
Dimensions
inches (mm)**

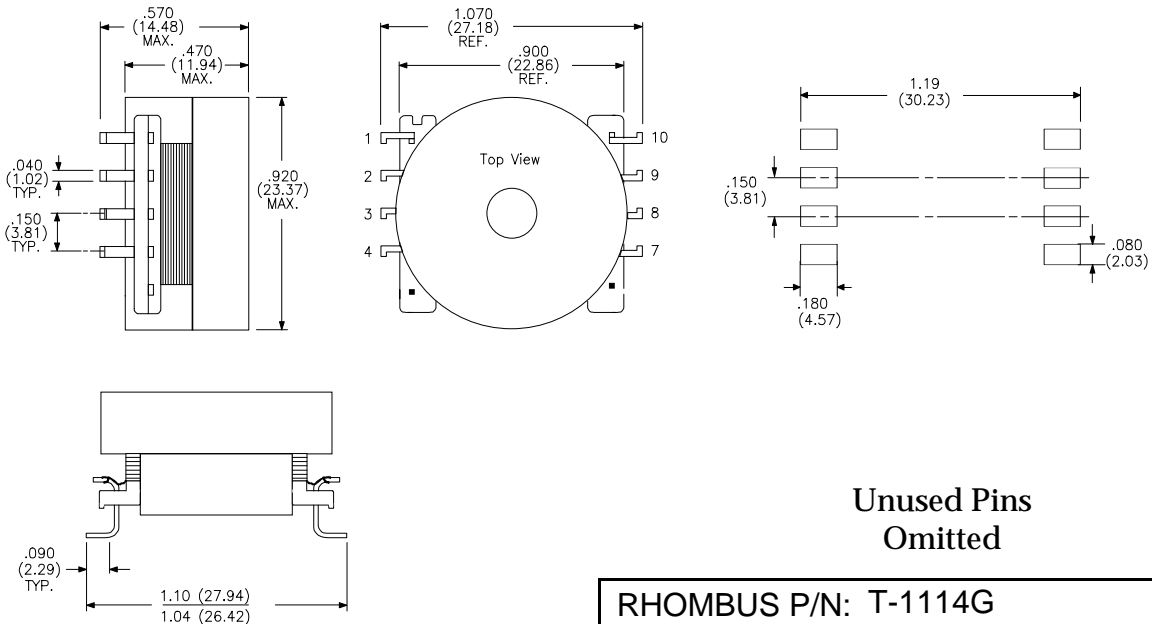

**Unused Pins
Omitted**

RHOMBUS P/N: T-1114G	
CUST P/N:	NAME:
DATE: 1/15/98	SHEET: 1 of 1