


PARAMETER		UNITS
Primary Impedance	600	Ω
Secondary Impedance	600	
Longitudinal Balance	60dB min. 300 - 3400 Hz	
Primary DC Resistance	8.5	Ω Max.
Secondary DC Resistance	10.5	Ω Max.
Frequency Response	+25 150Hz - 10kHz	dB
Insertion Loss	1.0 Max @ 1kHz	dB
Isolation (HI-POT)	500	V _{RMS}
Primary DC	None	
Return Loss	20dB min @ 1kHz	dB



T-1169

PIN POSITION GRID 0.100 (2.54)

● HOLES FOR BOBBIN PINS ○ CLIP SET TERMINATIONS

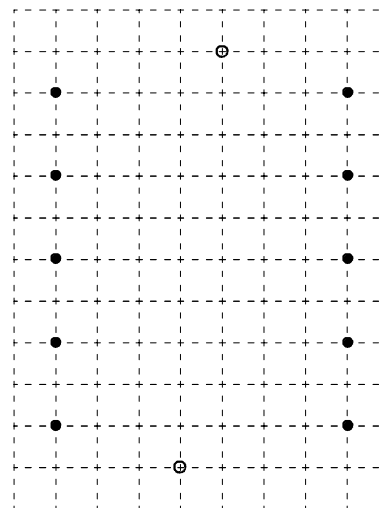


Physical Dimensions in inches (mm)

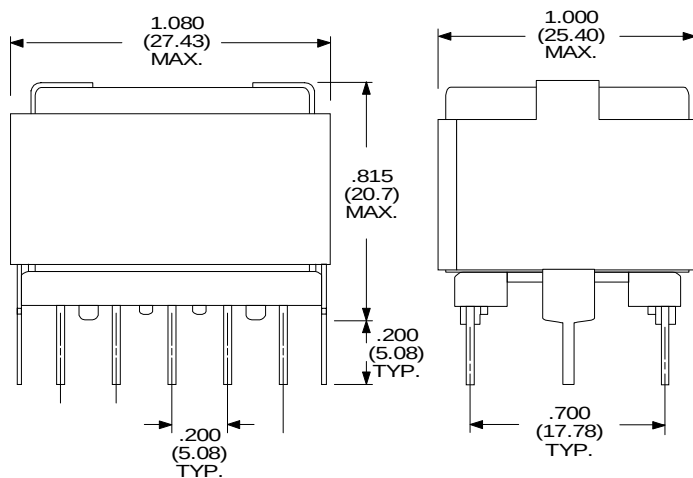

Pin Diameter
is 0.026 (0.66)

SCHEMATIC DIAGRAM

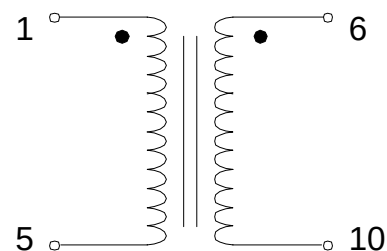

RHOMBUS INDUSTRIES INC. **FSCM NO. 16714**

RHOMBUS P/N: T-1169

CUST P/N:

NAME:

DATE: 12/18/98

SHEET: 1 OF 1