


NETWORK TRANSFORMER

Turns Ratio ($\pm 5\%$)

3.350 : 1 (Pins 3-4:1-5) short 6-2


Schematic Diagram



Electrical Specifications @ 25°C


Parameter	Min.	Max.	Units
Open Circuit Inductance (OCL) 100mV, @ 10.0 KHz, Pins 3-4	10		mH
Leakage Inductance 10KHz-100mVAC Pins 3-4, shorted 1-5, 2-6		10	μ H
Primary DC Resistance 3-4		1.38	ohms
Secondary DC Resistance 1-6		0.198	ohms
Secondary DC Resistance 2-5		0.25	ohms
Isolation (HI-POT) pins 3-1 to 5-2	1000		V _{RMS}

Physical Dimensions
inches (mm)

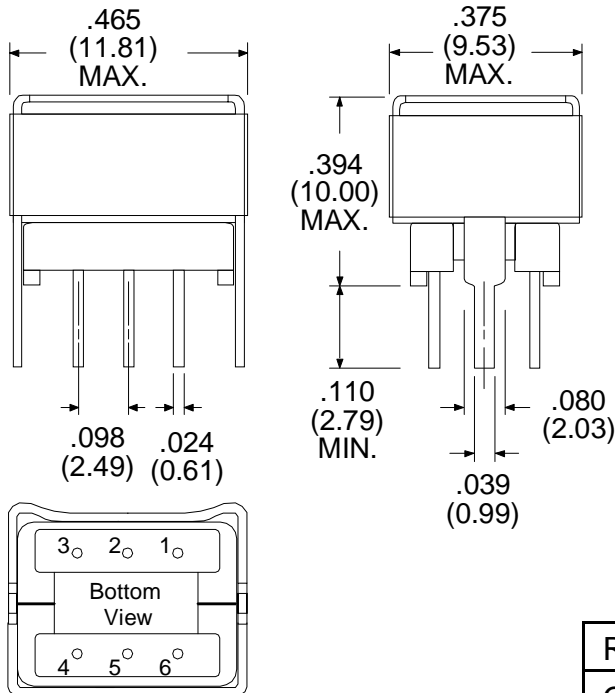

PIN POSITION GRID 0.098 (2.5)

- CLIP SET TERMINATIONS
- BOBBIN TERMINATIONS

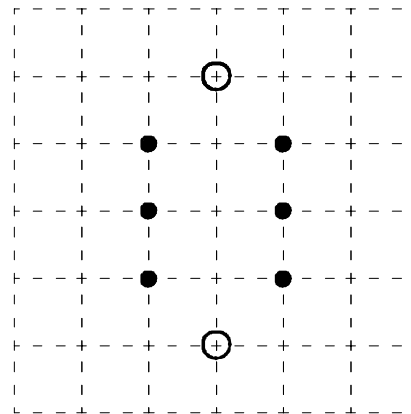

Rhombus P/N: **T-1270**

Cust. P/N:

Name:

Date: **9/2/99**

Sheet: 1 of 1