

*T3 INTERFACE TRANSFORMER

Turns Ratio ($\pm 3\%$)

1:4CT

PARAMETER	MIN.	MAX.	UNITS
Inductance	19		μHy
Rise Time		3.00	nS
Leakage Inductance		0.35	μHy
Capacitance ($C_{w/w}$)		15	pF
Primary DC Resistance		0.2	ohms
Isolation	1500		VRMS



Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Parts shipped in anti-static tubes. 55 pieces per tube


3 dB Bandwidth is .200 - 340 (MHz) typical, tested in a 75 ohm system

* Also suitable for DS3, E3 and STS-1 interfaces

PHYSICAL DIMENSIONS All dimensions in inches (mm):

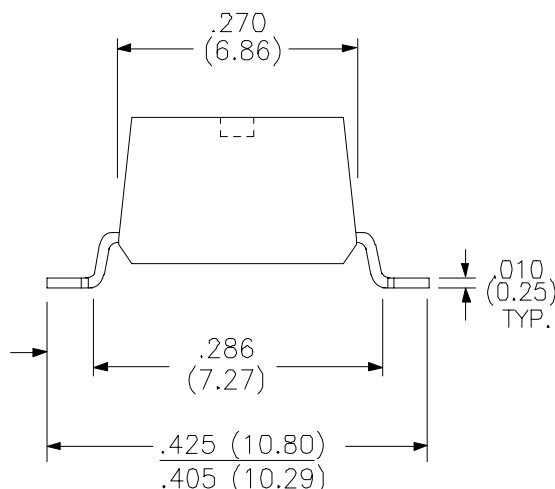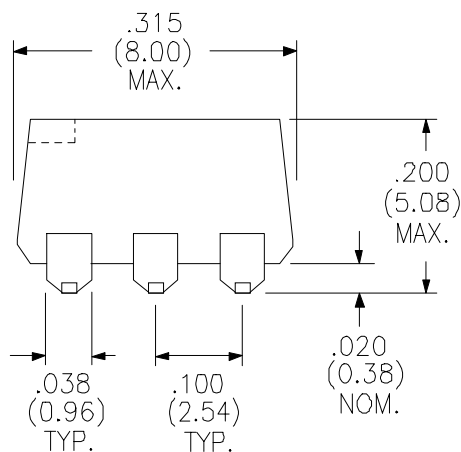

SCHEMATIC DIAGRAM:



RHOMBUS INDUSTRIES INC. **FSCM NO. 16714**

RHOMBUS P/N: **T-13106**

CUST P/N:

NAME:

DATE: **10/22/96**

SHEET: 1 OF 1