*T3 INTERFACE TRANSFORMER

Turns Ratio (± 2%)	1 : 1CT

PARAMETER	MIN.	TYP.	MAX.	UNITS
Inductance	160			µHy
Leakage Inductance		1.2		µHy
Capacitance ($C_{W/W}$)		5.0		pF
Primary DC Resistance			0.6	ohms
[1]Isolation	3000			VRMS

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Parts shipped in anti-static tubes. 44 pieces per tube

Tape & Reel Available

Reinforced insulation
*** Also suitable for DS3, E3 and STS-1 interfaces**

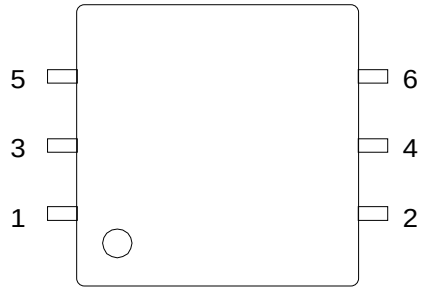

Dimensions in inches (mm)

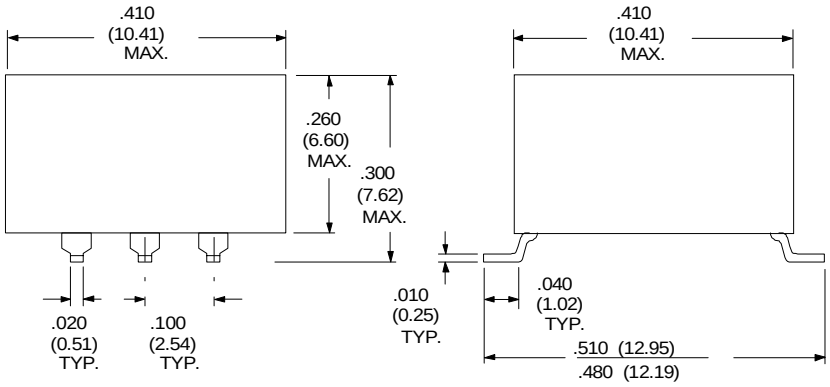

SCHEMATIC DIAGRAM



RHOMBUS P/N: T-13111	
CUST P/N:	NAME:
DATE: **6/04/99**	SHEET: 1 OF 1

Rhombus Industries Inc.
Transformers & Magnetic Products

15801 Chemical Lane, Huntington Beach, CA 92649
Phone: (714) 898-0960
FAX: (714) 896-0971

www.rhombus-ind.com