


ISDN S Interface Transformer

REINFORCED INSULATION PER EN 41003/EN 60950

Turns Ratio (± 2%)	1CT : 2CT
----------------------	-----------

SCHEMATIC DIAGRAM

PARAMETER	MIN.	MAX.	UNITS
Open Circuit Inductance	22		mHy
Leakage Inductance		11	μHy
Interwinding Capacitance ($C_{w/w}$)		100	pF
Distributed Capacitance (C_d)		180	pF
Primary DC Resistance	2.13	2.88	ohms
Secondary DC Resistance	4.25	5.75	ohms
Isolation (HI-POT)	4.0K		V_{RMS}
TEST CONDITIONS:			
Oscillation Voltage = 700mV			
Oscillation Frequency = 10.0 KHz			
Inductance measured on Primary winding. Pins 1 - 3.			

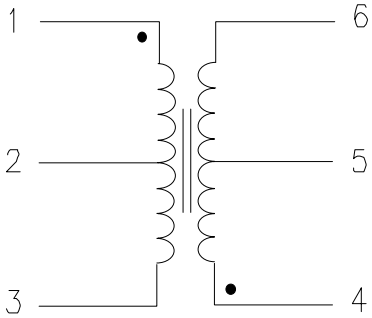

MEETS THE PULSE WAVEFORM
TEMPLATE OF CCITT I.430.


Primary is Line Side

Unbalanced current at TE: $\Delta I_{dc} = 1 \text{ mA max.}$

Longitudinal Conversion Loss - 10KHz to 300
KHz: 60dB min.

Flammability: Materials used in the
production of these units are UL94-VO
and meet requirements of IEC 695-2-2
needle flame test.

PHYSICAL DIMENSIONS inches (mm)

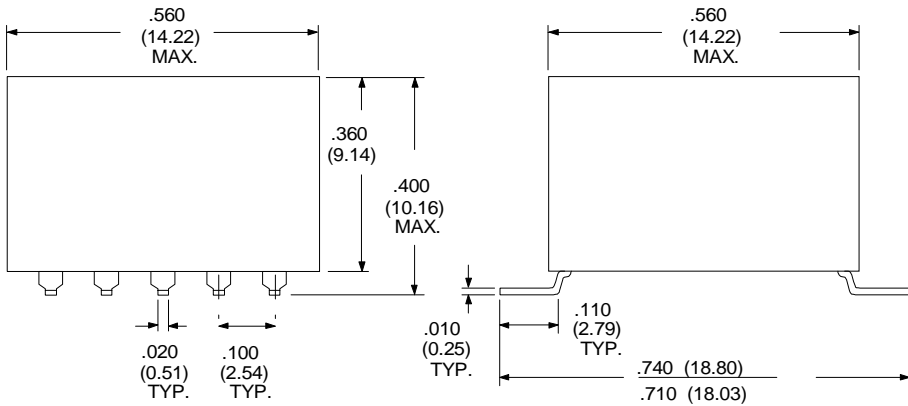

RHOMBUS P/N: T-13455	
CUST P/N:	NAME:
DATE: 12/09/98	SHEET: 1 OF 1