

# T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Reinforced Insulation Per EN 41003/EN 60950


Turns Ratio ( ± 5% )	1:1
----------------------	-----

Parameter	Min.	Max.	Units
Open Circuit Inductance Oscillation Voltage = 20mV Oscillation Frequency = 100.0 KHz	1.2		mH
Leakage Inductance Oscillation Level = 20mV Oscillation Frequency = 100.0 KHz		0.80	μH
Interwinding Capacitance (C <sub>WV</sub> ) Oscillation Frequency = 100.0 KHz		30	pF
Primary DC Resistance		0.7	ohms
Secondary DC Resistance		0.7	ohms
Isolation (HI-POT)	3000		V <sub>RMS</sub>


Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

*Tape and Reel available.*

## Physical Dimensions inches (mm)

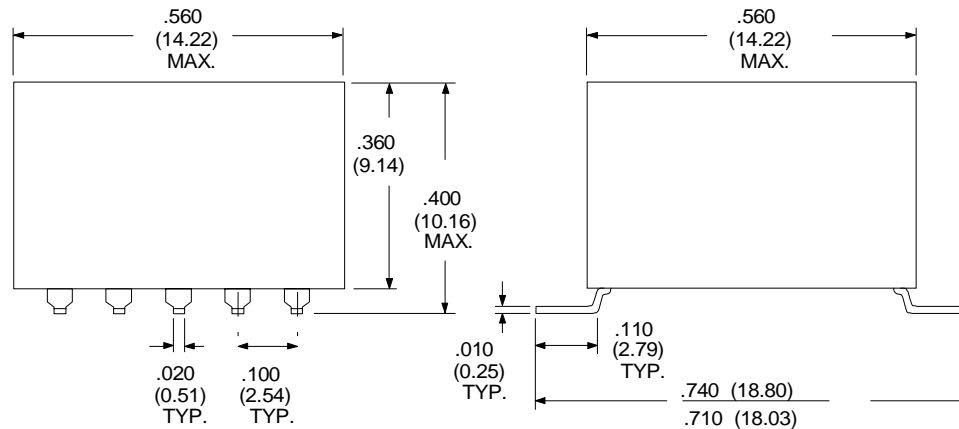

## Schematic Diagram



RHOMBUS P/N: **T-13613G**

CUST P/N:

NAME:

DATE: **04/25/96**

SHEET: 1 OF 1