

# T1/CEPT/ISDN PRI Interface Transformer

Turns Ratio ( ± 5% )	1:1.36CT & 1:2CT
----------------------	------------------

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.5		mH
Leakage Inductance		0.5	μH
Capacitance (C <sub>ww</sub> )		50	pF
Primary DC Resistance		0.7	Ohms
Secondary DC Resistance		0.9	Ohms


Parts shipped in anti-static tubes. 33 pieces per tube

*Tape & Reel Available*


Primary Pins 14-16 & 6-8

Isolation 1500 V<sub>RMS</sub> Min.

## PHYSICAL DIMENSIONS inches (mm)

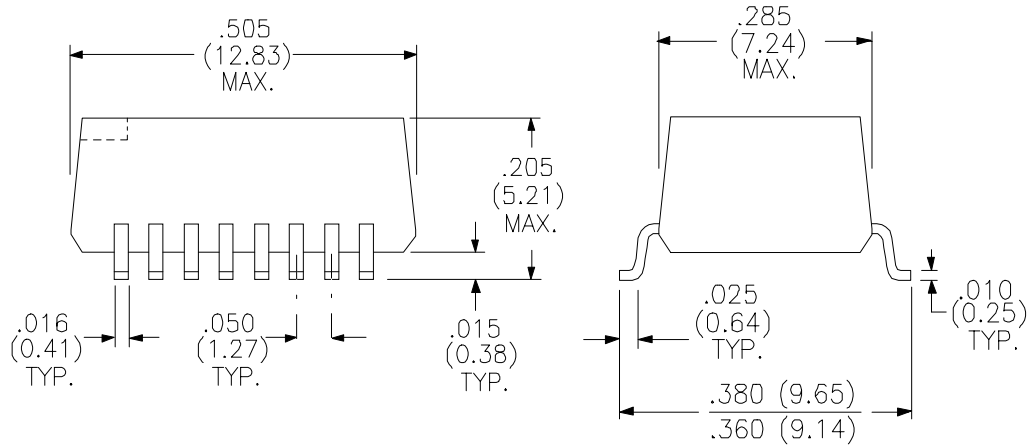

## Schematic Diagram

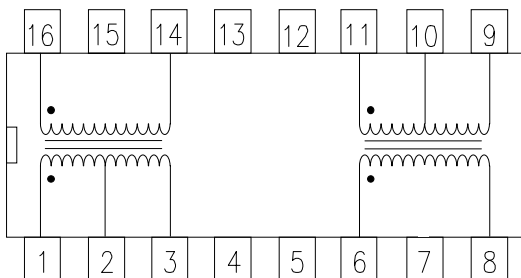

Rhombus P/N: <b>T-14100</b>	
Cust. P/N:	Name:
Date: <b>10/13/95</b>	Sheet: 1 of 1