

T1/CEPT/ISDN PRI Interface Transformer

Electrical Specifications @ 25°C

Turns Ratio (± 5%)	1:1.15CT & 1:2CT
----------------------	------------------

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.2		mH
Leakage Inductance		0.5 & 0.8	μH
Capacitance (C _{ww})		50	pF
Primary DC Resistance		0.8	Ohms
Secondary DC Resistance		1.8	Ohms
ET Product	10		VμS


Parts shipped in anti-static tubes. 33 pieces per tube

Tape & Reel Available


Primary Pins 14-16 & 6-8

Isolation 2000 V_{RMS} Min.

PHYSICAL DIMENSIONS inches (mm)

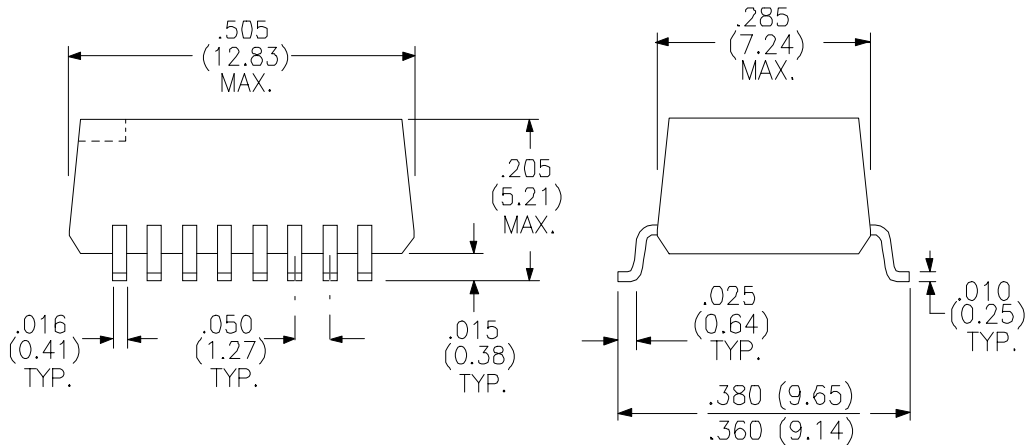

Schematic Diagram

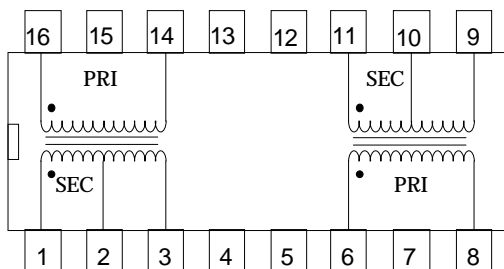

Rhombus P/N: **T-14103**

Cust. P/N:

Name:

Date: **10/13/95**

Sheet: 1 of 1