

T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Electrical Specifications @ 25°C

Turns Ratio (± 5%)	1:1CT & 1:1CT
----------------------	---------------

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.2		mH
Leakage Inductance		0.8 & 0.8	μH
Capacitance (C _{W/W})		50	pF
Primary DC Resistance		0.8	ohms
Secondary DC Resistance		0.8	ohms
ET Product	10		VμS

Parts shipped in anti-static tubes. 33 pieces per tube


Tape & Reel Available

Primary Pins 14-16 & 6-8
Isolation 2000 V_{RMS} Min.

PHYSICAL DIMENSIONS inches (mm)

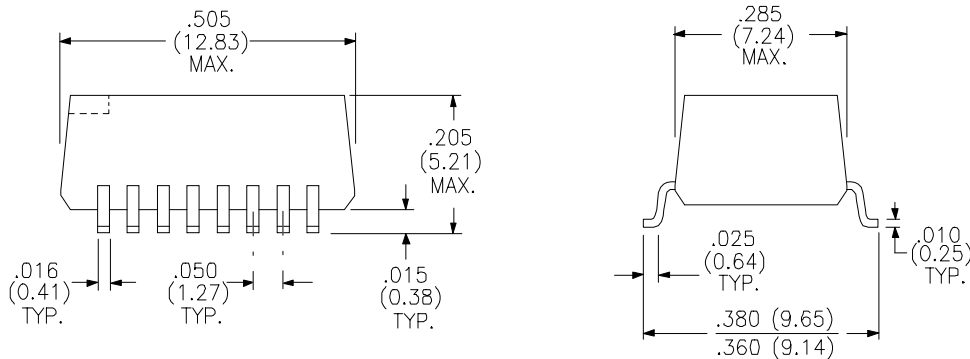

SCHEMATIC DIAGRAM:

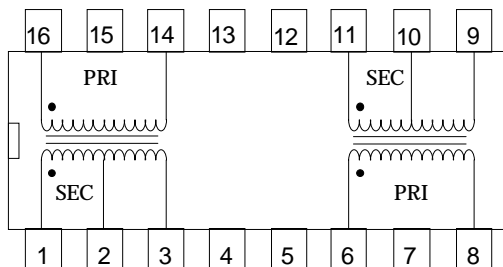

Rhombus P/N: T-14104	
Cust. P/N:	Name:
Date: 12/2/95	Sheet: 1 OF 1