

# T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Electrical Specifications @ 25°C

Turns Ratio ( ± 5%)	1:2.3CT & 1:1CT
---------------------	-----------------

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


Parts shipped in anti-static tubes. 33 pieces per tube

*Tape & Reel Available*


PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.2		mH
Leakage Inductance		0.8 & 0.8	μH
Capacitance (C <sub>W/W</sub> )		50	pF
Primary DC Resistance		0.8	ohms
Secondary DC Resistance		1.8/0.8	ohms
ET Product	10		VμS

**Primary Pins 14-16 & 6-8**  
**Isolation 2000 V<sub>RMS</sub> Min.**

## PHYSICAL DIMENSIONS inches (mm)

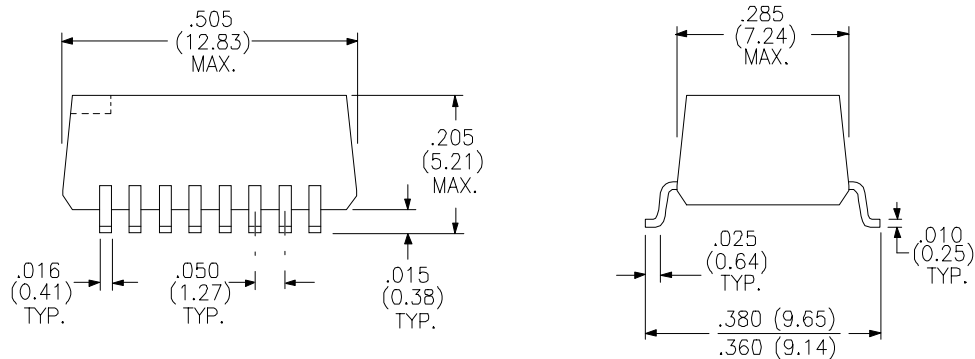

## SCHEMATIC DIAGRAM:

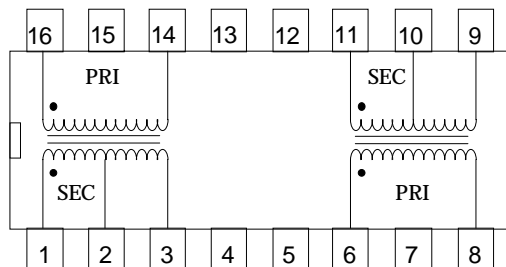

Rhombus P/N:	<b>T-14105</b>	
Cust. P/N:	Name:	
Date:	<b>12/2/95</b>	Sheet: 1 OF 1