

# T1/CEPT/ISDN PRI Interface Transformer

Turns Ratio ( ± 5% )	1:1.15CT & 1CT:2CT
----------------------	--------------------

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.2		mH
Leakage Inductance		0.6	μH
Capacitance (C <sub>ww</sub> )		30	pF
Primary DC Resistance		0.7	Ohms
Secondary DC Resistance		0.7 & 1.0	Ohms


Parts shipped in anti-static tubes. 33 pieces per tube

*Tape & Reel Available*


Primary Pins 14-16 & 6-8

Isolation 1500 V<sub>RMS</sub> Min.

## PHYSICAL DIMENSIONS inches (mm)

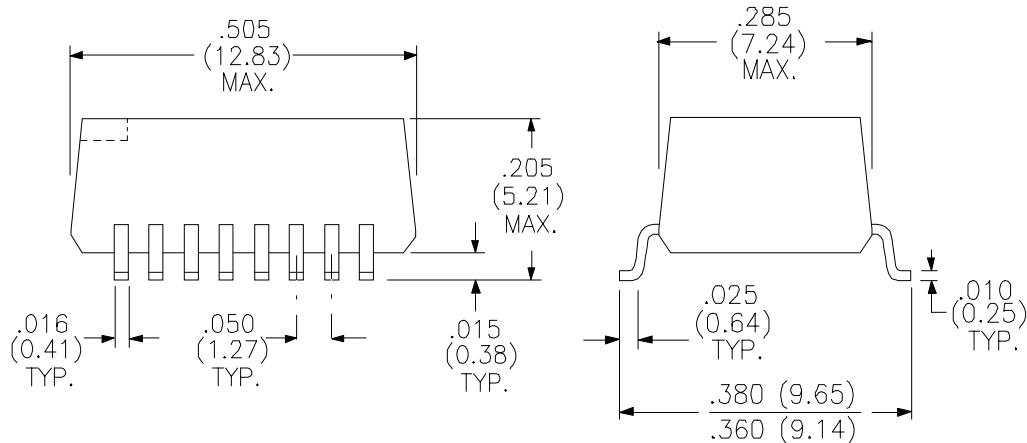

## Schematic Diagram

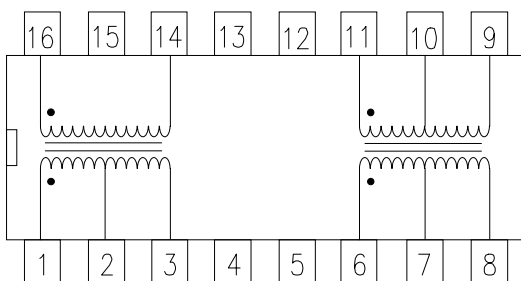

RHOMBUS P/N: **T-14116**

CUST P/N:

NAME:

DATE: **10/13/95**

SHEET: 1 of 1