

T1/CEPT/ISDN PRI Interface Transformer

Turns Ratio (± 5%)	*1 : 1/1.26 & 1 : 2CT
----------------------	-----------------------

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.2		mH
Leakage Inductance		0.6	μH
Capacitance (C _{ww})		30	pF
Primary DC Resistance		0.7	Ohms
Secondary DC Resistance		0.8 & 1.0	Ohms

Parts shipped in anti-static tubes. 33 pieces per tube


Tape & Reel Available

Primary Pins 14-16 & 6-8


Isolation 1500 V_{RMS} Min.

*Primary Pins 14-16 : Secondary Pins 2 - 3 = 1 : 1
 Primary Pins 14-16 : Secondary Pins 1 - 3 = 1 : 1.26

PHYSICAL DIMENSIONS inches (mm)

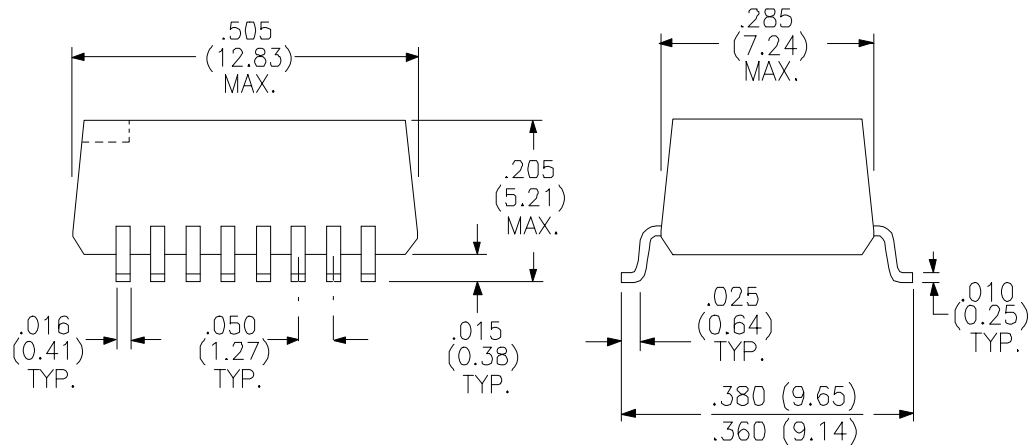

Schematic Diagram

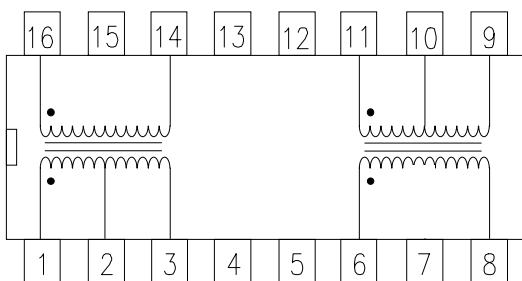

RHOMBUS P/N: T-14117B

CUST P/N:

NAME:

DATE: 07/02/98

SHEET: 1 OF 1