


T1/CEPT/ISDN PRI Interface Transformer

Turns Ratio (± 5%)	1:1.15CT & 1CT:2CT
----------------------	--------------------


PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.5 & 2.0		mH
Leakage Inductance		0.8 & 0.6	μH
Capacitance (C _{www})		40 & 45	pF
Primary DC Resistance		0.9 & 1.0	Ohms
Secondary DC Resistance		1.0 & 2.0	Ohms
ET Product	10		VμS

Primary Pins 14-16 & 6-8
Isolation 1500 V_{RMS} Min.
Operating Temperature Range: -40°C to +85°C

PHYSICAL DIMENSIONS inches (mm)

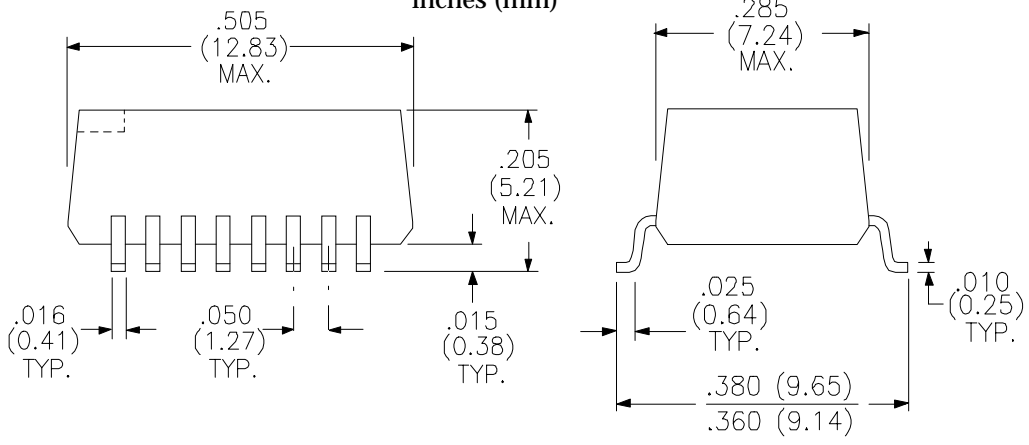

Schematic Diagram

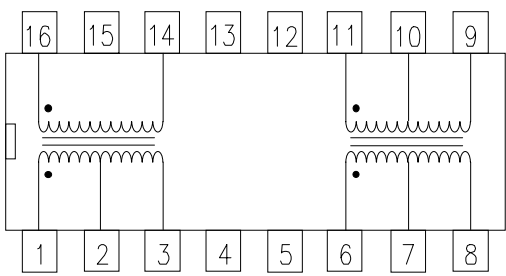

Rhombus P/N:	T-14163	
Cust. P/N:		Name: PairGain
Date:	12/2/96	Sheet: 1 of 1