

T1/CEPT/ISDN PRI Interface Transformer

Electrical Specifications @ 25°C

Turns Ratio (± 3%)	1:2CT (T1) & 1:1.36CT (T2)
----------------------	----------------------------

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Parts shipped in anti-static tubes. 33 pieces per tube


Tape & Reel Available.

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.2		mH
Leakage Inductance		0.4	μH
Capacitance (C _{w/w})		30	pF
Primary DC Resistance		0.7	Ohms
Secondary DC Resistance		1.2 & 1.0	Ohms
Operating Temp Range	-40	+85	°C


Primary Pins 16-14 & 6-8

Isolation 2000 V_{RMS} Min.

PHYSICAL DIMENSIONS inches (mm)

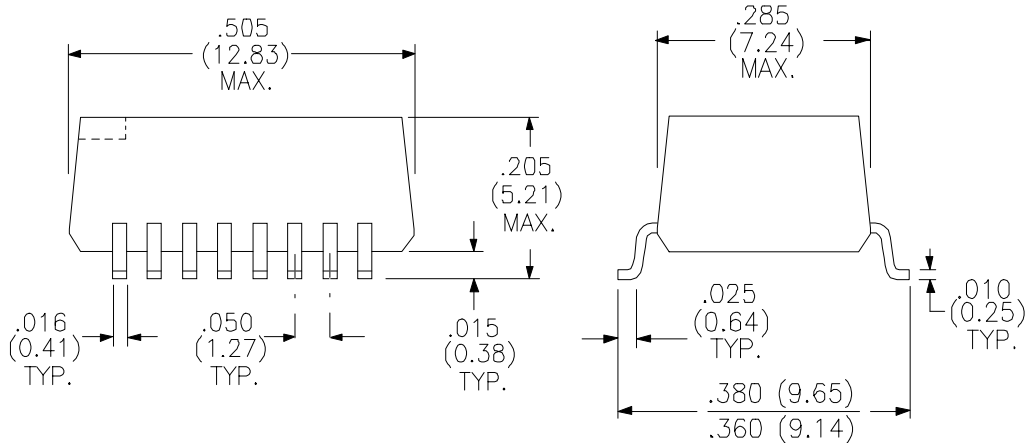

Schematic Diagram

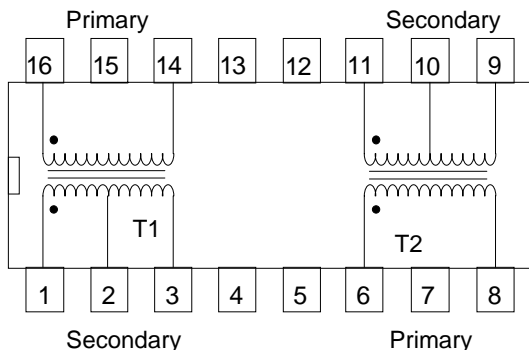

Rhombus P/N:	T-14175	
Cust. P/N:		Name: PairGain
Date:	03/10/99	Sheet: 1 of 1