

T1/CEPT/ISDN PRI Interface Transformer

Electrical Specifications @ 25°C

Turns Ratio ($\pm 3\%$) 1CT : 2.42CT (T1) & 1CT : 2.42CT (T2)

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.20		mH
Leakage Inductance		0.6	μ H
Capacitance (C_{ww})		25	pF
Primary DC Resistance		0.7	Ohms
Secondary DC Resistance		1.2	Ohms
Operating Temp Range	-40	+85	°C

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.

Contains both transmit and receive transformers


Parts shipped in anti-static tubes. 33 pieces per tube

Tape & Reel Available


Primary Pins 1-3 & 6-8

Isolation 1500 V_{RMS} Min.

PHYSICAL DIMENSIONS inches (mm)

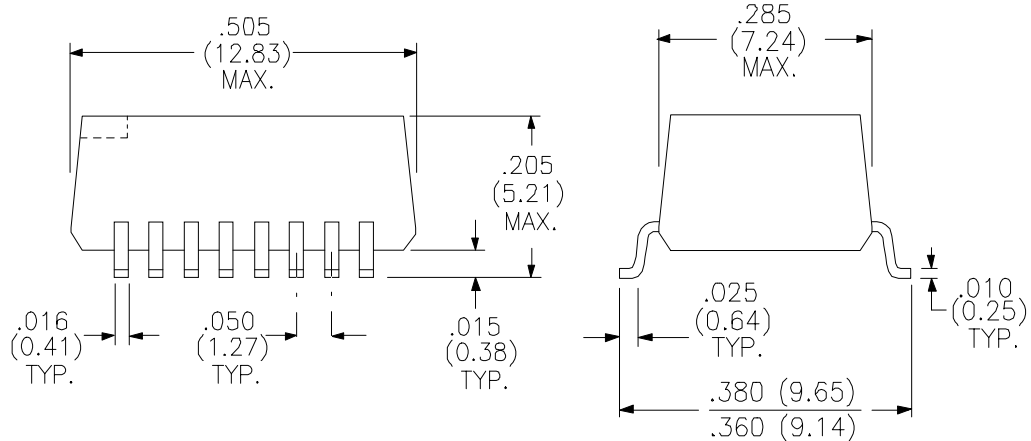

Schematic Diagram

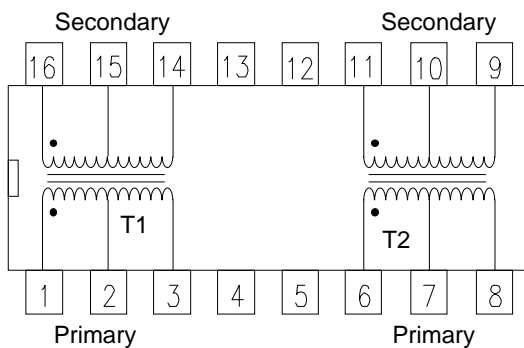

Rhombus P/N: **T-14178**

Cust. P/N:

Name:

Date: **10/20/99**

Sheet: 1 of 1