

T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Turns Ratio (± 5%)

1CT:2CT & 1CT:2CT

| PARAMETER | MIN. | MAX. | UNITS |
|--------------------------|------|------|-------|
| OCL (Primary) | 1.2 | | mH |
| Leakage Inductance | | 0.8 | μH |
| Capacitance (C_{ww}) | | 50 | pF |
| Primary DC Resistance | | 1.0 | ohms |
| Secondary DC Resistance | | 1.7 | ohms |
| ET Product | 10 | | VμS |

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


1500 V_{RMS} Isolation (Hi-Pot)

Parts shipped in anti-static tubes. 29 pieces per tube


Tape and Reel available.

Primary Pins 12-10 & 4-6

PHYSICAL DIMENSIONS All dimensions in inches (mm):

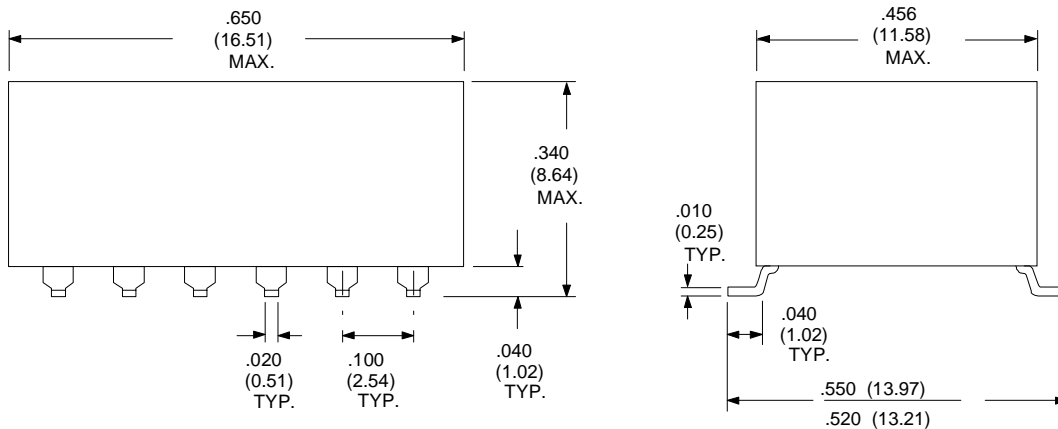

SCHEMATIC DIAGRAM:

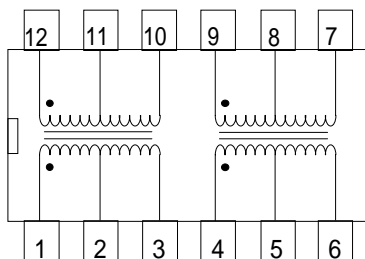

RHOMBUS P/N: **T-14400**

CUST P/N:

NAME:

DATE: **2/23/98**

SHEET: 1 OF 1