

T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Turns Ratio (± 5%)

1:2CT & 2:1

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.6		mH
Leakage Inductance		1.3 & 1.3	μH
Capacitance (C _{ww})		55 & 40	pF
Primary DC Resistance		1.1 & 1.1	ohms
Secondary DC Resistance		1.1 & 0.7	ohms
ET Product	10		VμS

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


1500 V_{RMS} Isolation (Hi-Pot)

Parts shipped in anti-static tubes. 29 pieces per tube


Tape and Reel available.

Primary Pins 1-3 & 4-6

PHYSICAL DIMENSIONS All dimensions in inches (mm):

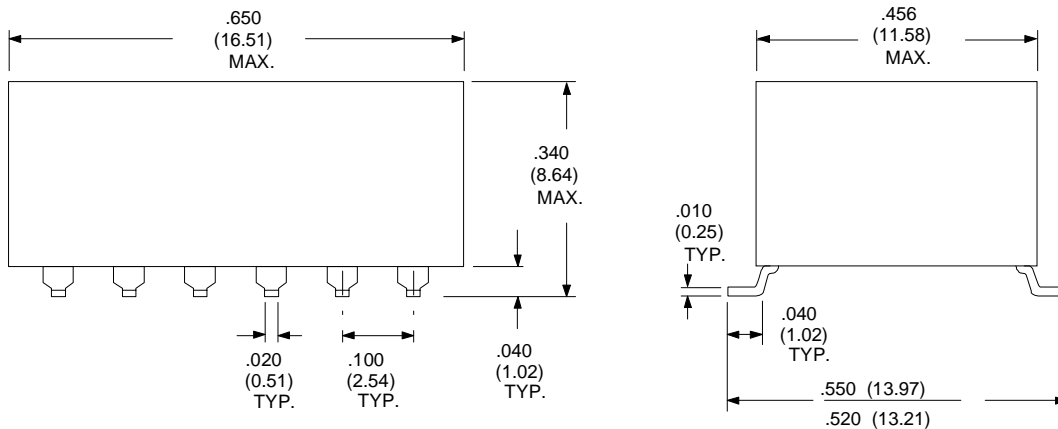

SCHEMATIC DIAGRAM:

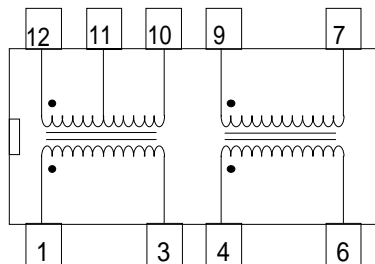

RHOMBUS P/N: **T-14404**

CUST P/N:

NAME:

DATE: **2/23/98**

SHEET: 1 OF 1