

# T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Turns Ratio ( $\pm 5\%$ )

1CT : 1CT & 1CT : 1CT

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.2		mH
Leakage Inductance		0.8	$\mu$ H
Capacitance ( $C_{ww}$ )		50	pF
Primary DC Resistance		1.0	ohms
Secondary DC Resistance		1.0	ohms
ETProduct	10		$V\mu$ S

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


1500  $V_{RMS}$  Isolation (Hi-Pot)

Parts shipped in anti-static tubes. 29 pieces per tube


*Tape and Reel available.*

## Primary Pins 1-3 & 4-6

## Dimensions in inches (mm)

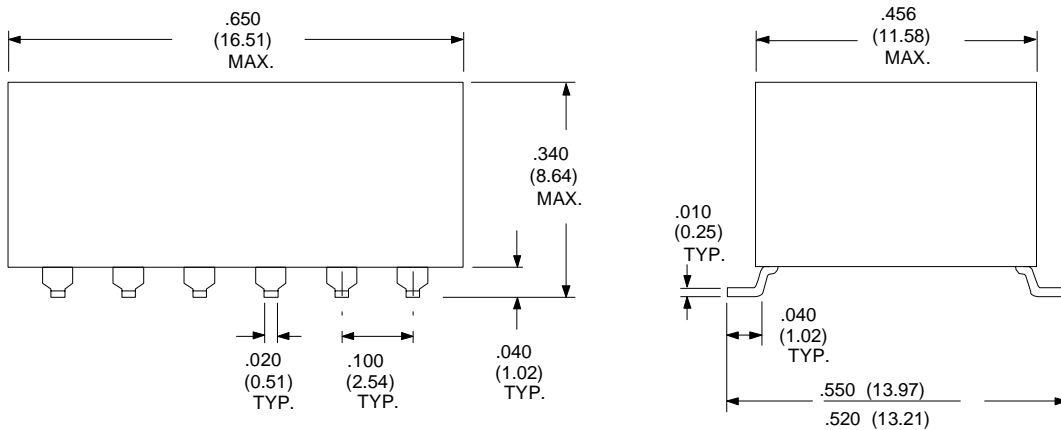

## SCHEMATIC DIAGRAM

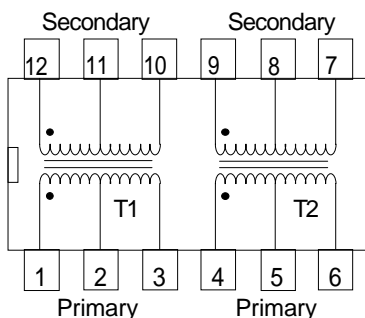

RHOMBUS P/N: **T-14405**

CUST P/N:

NAME:

DATE: **2/23/98**

SHEET: 1 OF 1