

T1/CEPT/ISDN PRI INTERFACE TRANSFORMER

Turns Ratio ($\pm 5\%$)

1CT:1.15CT & 1CT:1CT

PARAMETER	MIN.	MAX.	UNITS
OCL (Primary)	1.5		mH
Leakage Inductance		0.8	μ H
Capacitance (C_{ww})		60	pF
Primary DC Resistance		1.0	ohms
Secondary DC Resistance		1.1 & 1.0	ohms
ET Product	10		$V\mu$ S

Flammability: Materials used in the production of these units meet requirements of UL94-VO and IEC 695-2-2 needle flame test.


1500 V_{RMS} Isolation (Hi-Pot)

Parts shipped in anti-static tubes. 29 pieces per tube


Tape and Reel available.

Primary Pins 12-10 & 4-6

PHYSICAL DIMENSIONS All dimensions in inches (mm):

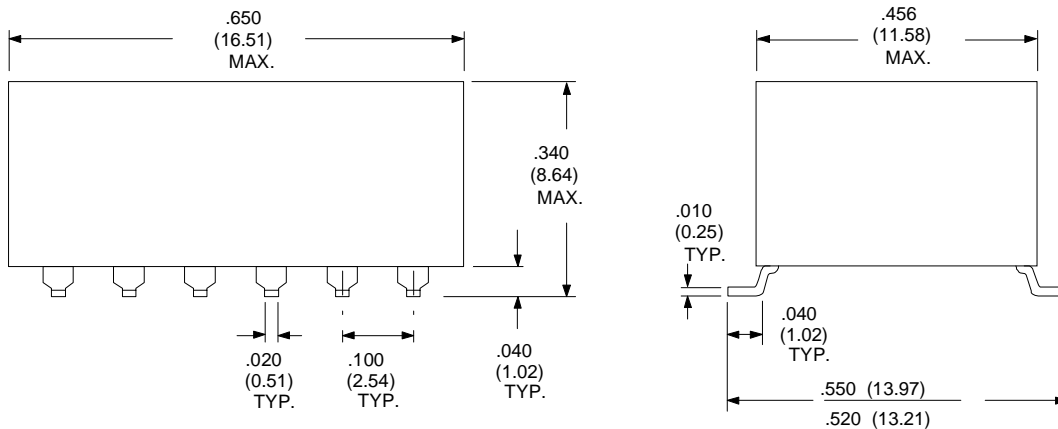

SCHEMATIC DIAGRAM:

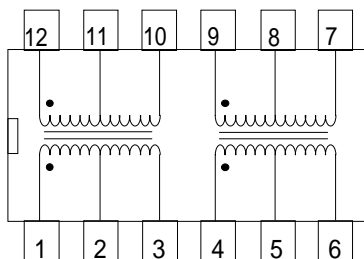

RHOMBUS P/N: **T-14408**

CUST P/N:

NAME:

DATE: **2/23/98**

SHEET: 1 OF 1